

# PureLine Brilliant White 24" Combi-Steam Oven

DGC 6800-1 XL BRWS



# PureLine Combi-Steam Oven

## DGC 6800-1 XL BRWS



### DGC 6800-1 XL BRWS

#### Features:

- M Touch innovative and revolutionary controls are both easy-to-operate and navigate. An intuitive swipe of the screen will quickly lead you to your desired selection
- MultiSteam technology delivers powerful external steam generation and optimum steam distribution via 6 inlet ports
- Wired roast probe for perfect roasting
- 3-in-1 appliance
  1. True European convection oven
  2. Steam oven
  3. Combination of steam and convection oven
- MasterChef and MasterChef Gourmet menus offer over 150 food types to cook to perfection
- XL stainless steel cavity
- Lift up control panel conceals water and condensate container (both containers are dishwasher-safe)
- The simple yet sleek Chrome Silhouette handle seems to float, enhancing its modern design lines



#### SPECIFICATIONS

##### DGC 6800-1 XL BRWS — Item 23680071USA

|  |   |
|--|---|
| Overall Fascia Dimensions                        | 23 <sup>7</sup> / <sub>16</sub> " (595 mm) W x 18" (455.5 mm) H x 7 <sup>7</sup> / <sub>8</sub> " (22 mm) D |
| Overall Unit Width - Excluding Fascia Dimension  | 21 <sup>9</sup> / <sub>16</sub> " (548 mm)  |
| Overall Unit Height - Excluding Fascia Dimension | 17 <sup>11</sup> / <sub>16</sub> " (449 mm)   |
| Overall Unit Depth - Excluding Fascia Dimension  | 22 <sup>3</sup> / <sub>8</sub> " (567 mm)   |
| Oven Door Clearance                              | 12 <sup>9</sup> / <sub>16</sub> " (319 mm)  |

##### Built-In

|                              |   |
|------------------------------|---|
| Minimum Opening Width        | 22 <sup>1</sup> / <sub>16</sub> " (560 mm)  |
| Minimum Opening Height       | 17 <sup>11</sup> / <sub>16</sub> " (450 mm)   |
| Minimum Opening Depth        | 22 <sup>1</sup> / <sub>2</sub> " (572 mm)   |
| Minimum Base Support         | 60 lbs  |
| Additional Cut-Outs Required | Venting cut-out required<br>19 <sup>11</sup> / <sub>16</sub> " x 1 <sup>9</sup> / <sub>16</sub> " (500 x 40 mm) |

##### Electrical

|                         |  |
|-------------------------|--|
| Electrical Requirements | 208V/240V, 60Hz, 20A                             |
| Power Rating            | 240V - 3.7 kw<br>208V - 3.2 kw                   |
| Power Cord              | Molded plug - NEMA 6-20, power cord 5 ft (1.5 m) |

##### Shipping

|                     |   |
|---------------------|---|
| Shipping Weight     | 65 lbs  |
| Shipping Dimensions | 26 <sup>7</sup> / <sub>32</sub> " (666 mm) W x 21 <sup>5</sup> / <sub>8</sub> " (549 mm) H x 23 <sup>1</sup> / <sub>16</sub> " (535 mm) D |

##### Support


|               |  |
|---------------|--|
| Call Miele    | (800) 999-1360   |
| Miele Website | <a href="http://www.mieleusa.com">www.mieleusa.com</a>         |
| 20/20 Link    | <a href="http://2020technologies.com">2020technologies.com</a> |

# PureLine Combi-Steam Oven DGC 6800-1 XL BRWS




## PRODUCT VIEWS

### Isometric View

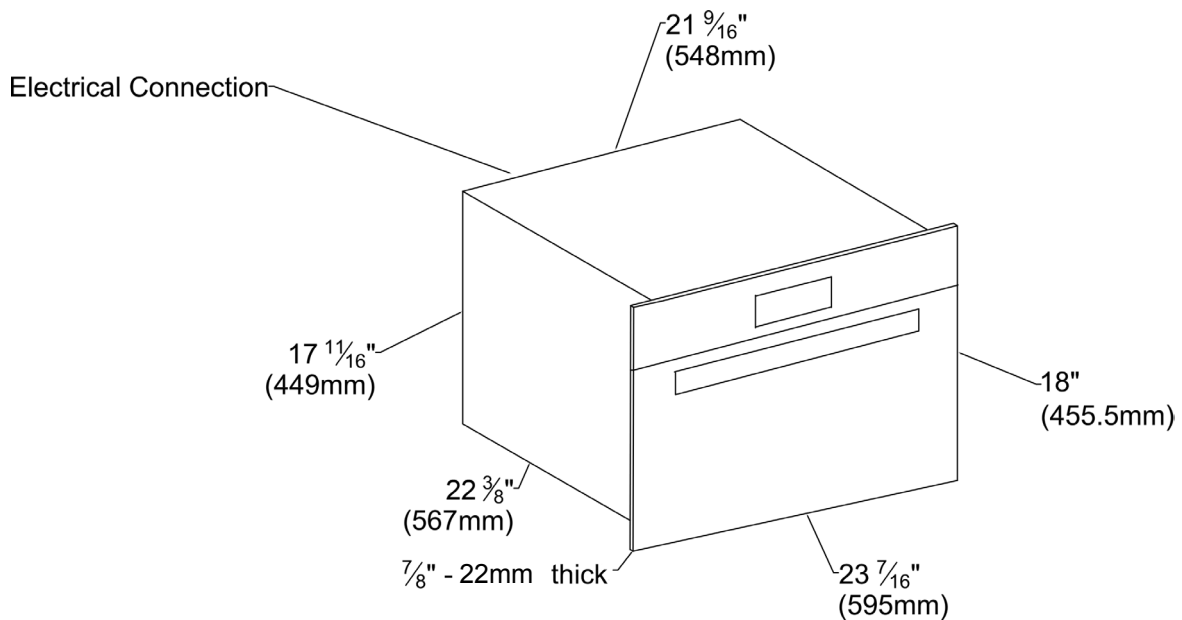

### Front View

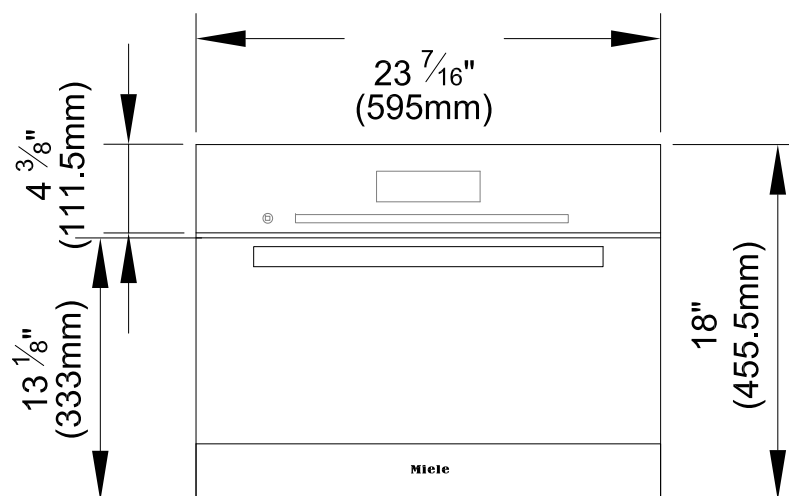


PureLine Combi-Steam Oven  
DGC 6800-1 XL BRWS




INSTALLATION SPECIFICATIONS

Top View, Door Open

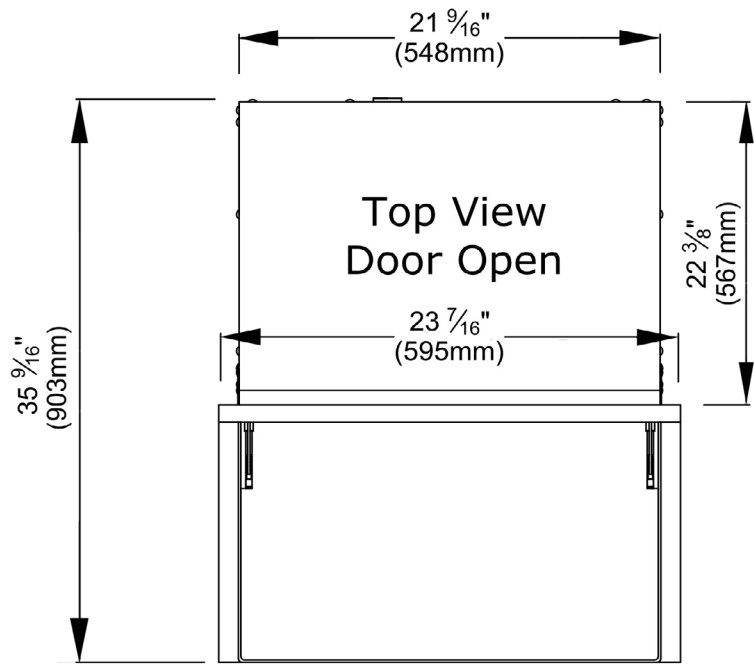

Side View, Door Open

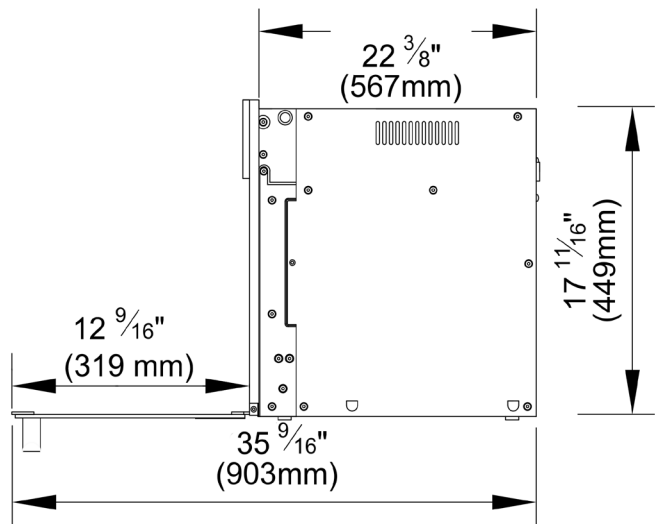


# PureLine Combi-Steam Oven DGC 6800-1 XL BRWS



## INSTALLATION SPECIFICATIONS


Door Swing and Face Detail

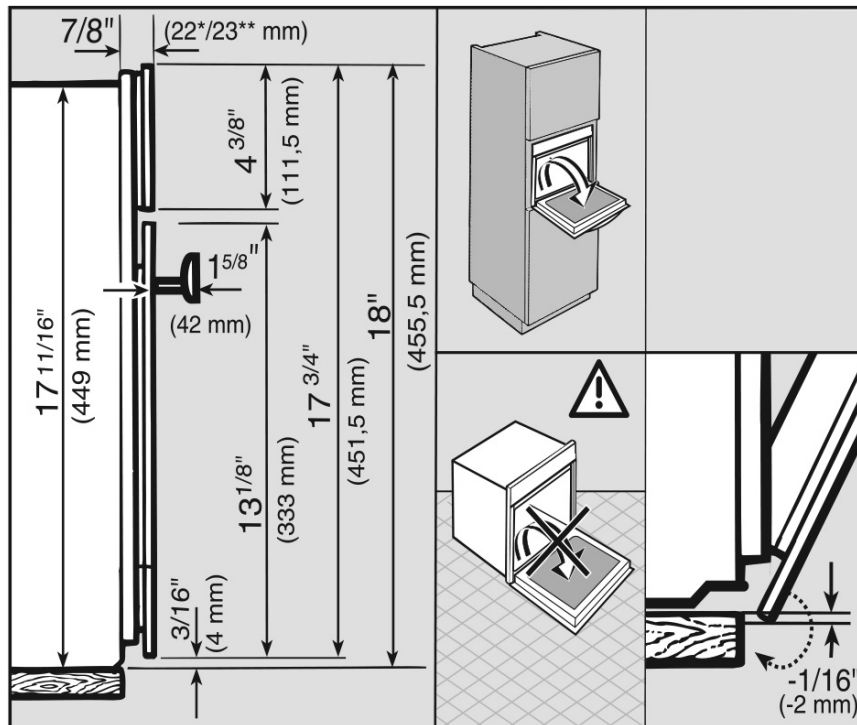

\* Appliances with glass front

\*\* Appliances with metal front

Control Panel Swivel View

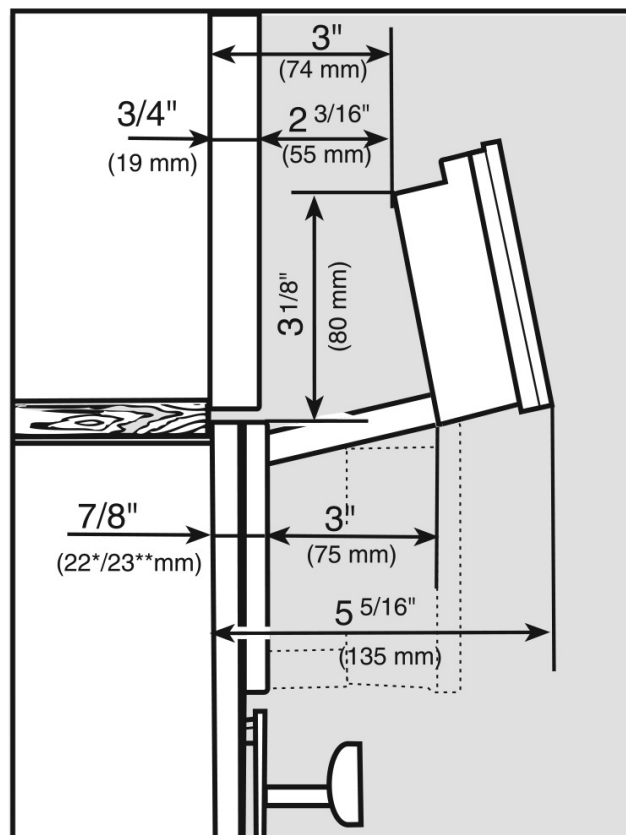

\* Appliances with glass front


\*\* Appliances with metal front

# PureLine Combi-Steam Oven DGC 6800-1 XL BRWS



## INSTALLATION SPECIFICATIONS

### Tall Cabinet Installation

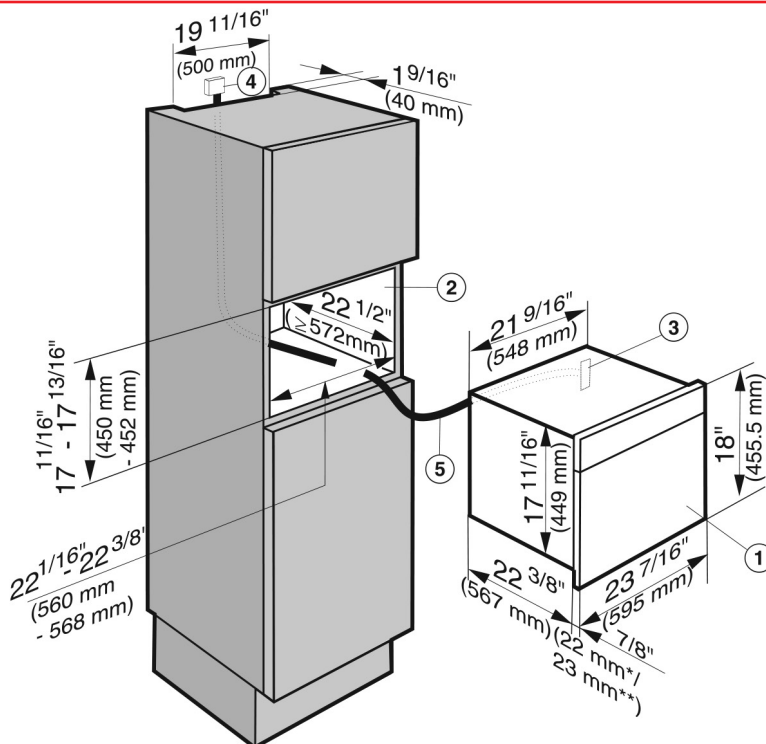


\* Appliances with glass front

\*\* Appliances with metal front

- ① Combi Steam Oven
- ② Installation niche
- ③ Power supply to the appliance
- ④ Recommended location for electrical connection
- ⑤ Power cord

### Tall Cabinet Installation — Venting Requirements

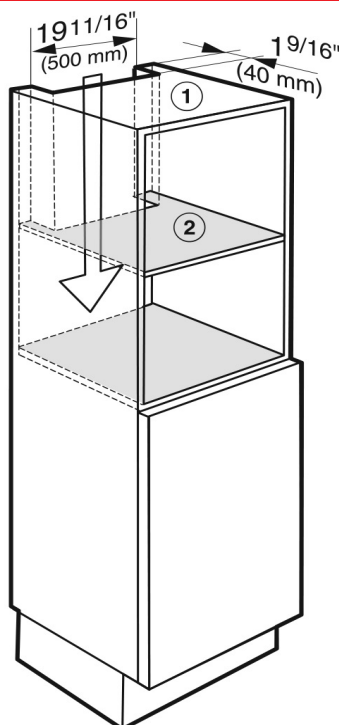

To ensure that the Combi Steam Oven has adequate ventilation, the following cut-outs measuring 19 11/16" x 1 9/16" (500 x 40 mm) must be made:

- ① in the top of the cabinet
- ② in the center shelf above the installation niche




# PureLine Combi-Steam Oven DGC 6800-1 XL BRWS



## INSTALLATION SPECIFICATIONS


Installation Above 24" Oven

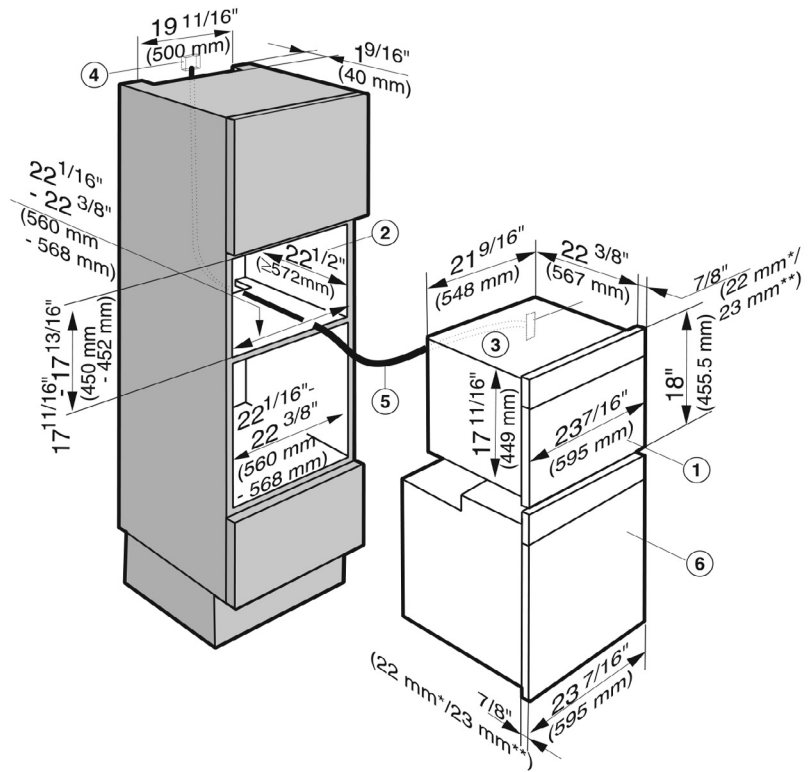

\* Appliances with glass front

\*\* Appliances with metal front

Installation Above 24" Oven —  
Venting Requirements

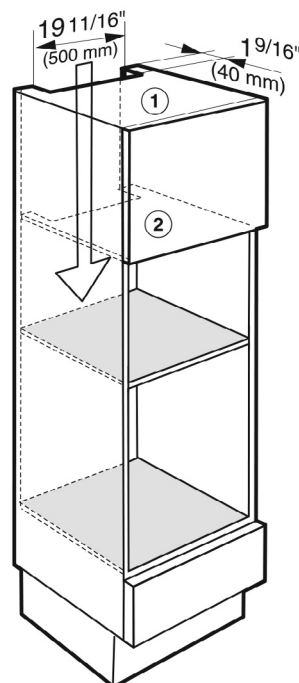

To ensure that the Combi Steam Oven has adequate ventilation, the following cut-outs measuring 19 11/16" x 1 9/16" (500 x 40 mm) must be made:

- ① in the top of the cabinet
- ② in the center shelf above the installation niche


For the oven ventilation cut-out, please see the information in the oven installation instructions.

# PureLine Combi-Steam Oven DGC 6800-1 XL BRWS



## INSTALLATION SPECIFICATIONS

### Installation Undercounter

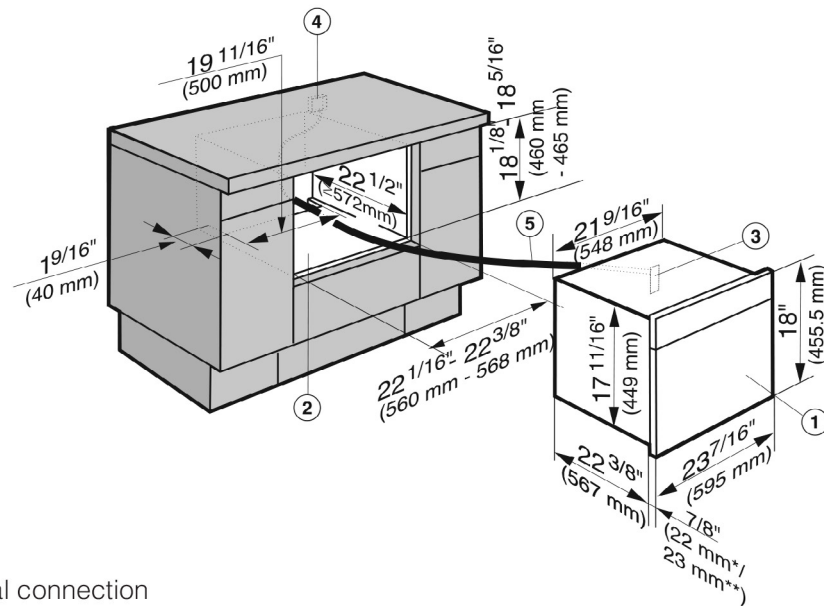


- ① Combi Steam Oven
- ② Installation niche
- ③ Power supply to the appliance
- ④ Recommended location for electrical connection
- ⑤ Power cord

\* Appliances with glass front

\*\* Appliances with metal front

If the appliance is to be installed under a cooktop, observe the instructions for installation of the cooktop and its installation height.

### Installation Undercounter — Venting Requirements

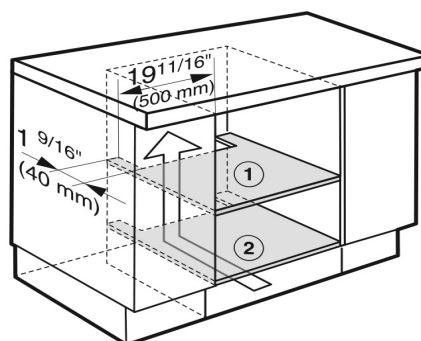

To ensure that the Combi Steam Oven has adequate ventilation, the following cut-outs measuring 19 11/16" x 1 9/16" (500 x 40 mm) must be made:

- ① in the top of the cabinet
- ② in the center shelf above the installation niche




# PureLine Combi-Steam Oven

## DGC 6800-1 XL BRWS




### HANDLE DETAILS

All Miele Signature And PureLine  
Handle Dimensions

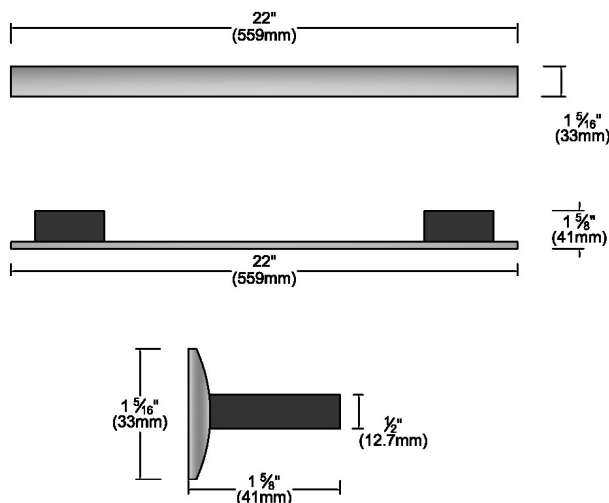

Please note hinges may require adjusting or replacing when changing from a ContourLine Handle to a PureLine or Miele Signature Handle.

All ContourLine Handle  
Dimensions

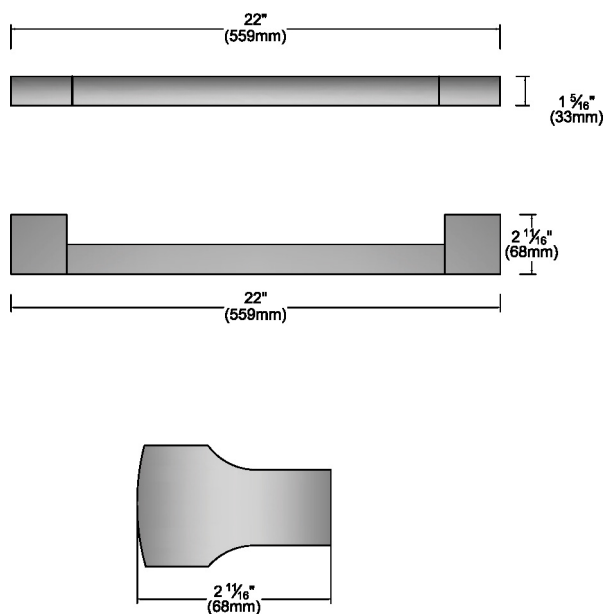

Please note hinges may require adjusting or replacing when changing from a PureLine or Miele Signature Handle to a ContourLine Handle.