

Futura Series Slimline Integrated Dishwasher

DIMENSION G 4510 SCi



Futura Series Dishwashers Model Overview




		CLASSIC	CRYSTAL	DIMENSION	DIMENSION	DIAMOND	PROFI
Baskets	FlexiCare	•					
	FlexiCare Plus		•		•		
	FlexiCare Premium			•			
	FlexiCare Deluxe					•	•
Cutlery	Cutlery basket	•	•				
	Cutlery tray	•	•		•		
S	3D cutlery tray			•		•	•
	AutoClose			-		•	•
	BrilliantLight					•	•
Convenience	Delay Start	•	•	•		•	•
	RemoteVision [™]					•	
	ComfortClose	•	•	•		•	•
	Perfect GlassCare		•	•		•	
	Water softener			•		•	•
	ADA compliant*	•*	10.2	•			PHAG
	Q Acoustic ratings	Q1	Q2	Q4	Q3	Q5	Q1
Sensors	AutoSensor	•	•	•	•	•	
	SensorDry			•		•	
Ser	Automatic Load-Size Sensor					•	
	Pre-finished (Black or White)	•	•		-		
	Pre-finished (Clean Touch Steel™)	•	•	•			
Finishes	Integrated - I (Clean Touch Steel™)		_	•	•	•	
inis	Fully Integrated - Vi (Custom Panel)	•		•		•	
÷	Fully Integrated - SC SF (Clean Touch Steel [™])	•	•	•		•	
	Normal	•		•	•	•	
Programs	Express		•		•	•	
	Rinse & Hold			•	•		
	SaniWash	•		•	•		
	Pots & Pans		•	•	•		
	Economy	•		-			
1	China & Crystal				•	•	
	Turbo Mode	•	•	•			
	Intensive Mode						
Diamond Programs	ExtraQuiet			•			
	Heavy Soil						
	SensorWash						
	Light						
	Energy Saver		-	-	_	-	
	Plastics			-		•	
	Starch/Cheese			-		•	
	Tall Items			-			
	Glass - No Rinse Aid (Warm)						
	Glass - No Rinse Aid (Cold)			-			
ProfiLine Programs	ProSpeed 23 minute cycle						
	Universal			-			
	Sanitize					_	
	Beer Glasses			-		-	
Drying	CleanAir™	•	•	•	•		-
	Advanced CleanAir [™]						
	AutoOpen [™] Drying			•		-	
	interaction mixing						

* Classic G 4281 SCVI and Dimension G 5670 SCVI are ADA compliant

Futura Series Slimline Intergrated Dishwashers Page 2 of 5



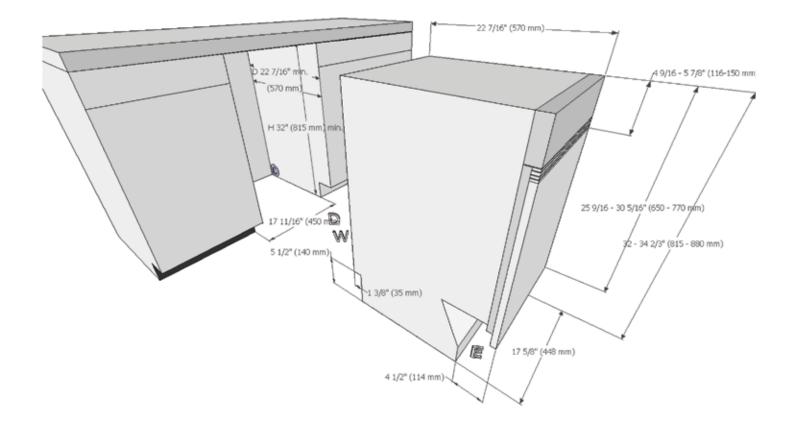

Location Codes

C – Cutout 2 1/4" x 4" (58 mm x 102 mm) for water, drain and electric pass-through.

Adjust according to water and drain location.

- D 5 foot (1.5 meter) flexible drain hose connects lower center rear.
- E 5 foot (1.5 meter)- 120 Volt 15 Amp 3-wire molded plug power supply connects lower left rear.
- W 5 foot (1.5 meter) "Double Waterproof" flexible water intake hose connects lower center rear.

Notes

All installations must be done in accordance with local codes.


Drawing is not to scale

Specification Sheets OJS 11032011



Custom Panel Installations

Some Miele dishwashers do not come equipped with a front panel. These dishwashers are designed to accept a custom door panel supplied by the cabinet maker. Miele has a unique panel integration system which allows the dishwasher to align with the surrounding cabinets.

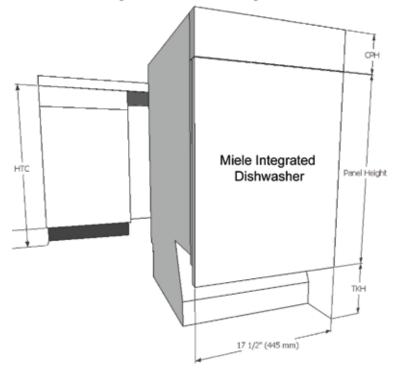

Width:	17 1/2" (445 mm) in all cases						
Thickness:	¾" (19 mm) in all cases						
Height:	Determined using the following						
	calculation:						
Panel Height = HTC – CPH – TKH							

HTC = Height to the underside of countertop CPH = Control panel height (Note 1)

TKH = Toe kick height

Note: Control panel height is determined by the height of the adjoining drawers in the cabinets. The height is adjustable between 4 9/16" and 5 7/8" (116-150 mm) with spacer strips provided.

Maximum panel height: 27 1/4" (692 mm) Minimum panel height: 21 1/4" (540 mm) Maximum panel weight: 21 Pounds (9.5 kg)

GDU Kit Installations

Miele offers pre-fabricated panels for all integrated units called GDU kits. These panels are designed for various toe-kick heights and include a black plastic toe kick cover.

 65-1 4" Toekick Whit 65-1 4" Toekick Clear	
This GDU accepts a custom insert: Height: 25 11/16" (650 mm) Width 17 1/2" (445 mm) Thick 1/8" (3 mm)	
Exposed toe-kick	

rawing is not to scale

Specification Sheets OJS 11032011


Futura Series Slimline Integrated Dishwashers



Height to underside of countertop



Water Connection

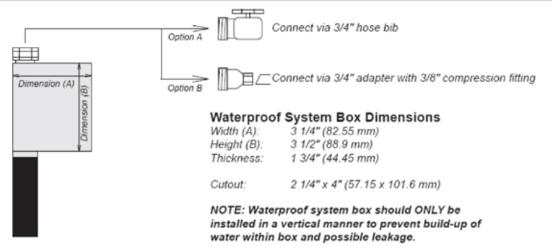

Waterproof System

Temperature: 110° - 130° F Pressure: 4.5 - 145 PSI Drain hose: 7/8" ID - 5 feet (1.5 meters) long

Specification Sheets OJS 11032011

liele