

Puristic Island
Ventilation Hood

DA 6690 D OBSW



Puristic Island Ventilation Hood

DA 6690 D OBSW



DA 6690 D OBSW

Features:

- LED ClearView lighting
- Con@ctivity - communication between hood and cooktop
- Touch on Glass controls
- Four fan speeds (incl. intensive)
- Removable dishwasher-safe stainless steel grease filter
- Filter saturation indicator (grease and charcoal filters)
- Delayed shutdown for 5 or 15 minutes
- Automatic shutdown of intensive level, programmable for 10 minutes

SPECIFICATIONS


DA 6690 D OBSW – Item 28669045USA

Max CFM	625 CFM
Canopy Dimensions	35 ³ / ₈ " (898mm) W x 3 ³ / ₈ " (85mm) H x 23 ⁹ / ₁₆ " (598mm) D
Vented Height	27 ³ / ₄ " (705mm) - 39 ⁹ / ₁₆ " (1005mm)
Recirculation Height	30 ¹ / ₈ " (765mm) - 43 ⁵ / ₁₆ " (1075mm)
Chimney Dimensions	12" (305mm) W x 11 ⁵ / ₈ " (295mm) D
Electrical	
Electrical Requirements	120 V, 60 Hz, 15 Amps
Power Cord Requirements	The hood must be hard wired. A power cord with a minimum length of 27 ⁹ / ₁₆ " (700mm) is required between the ceiling and the hood connectors. Power cord is not included.
Exhaust Duct	
Recommended Duct Diameter	6" (150mm)
Shipping	
Shipping Weight	77 lbs (35kg)
Support	
Call Miele	800.843.7231
Miele Website	www.mieleusa.com
20/20 Link	2020technologies.com

Puristic Island Ventilation Hood DA 6690 D OBSW



PRODUCT VIEW

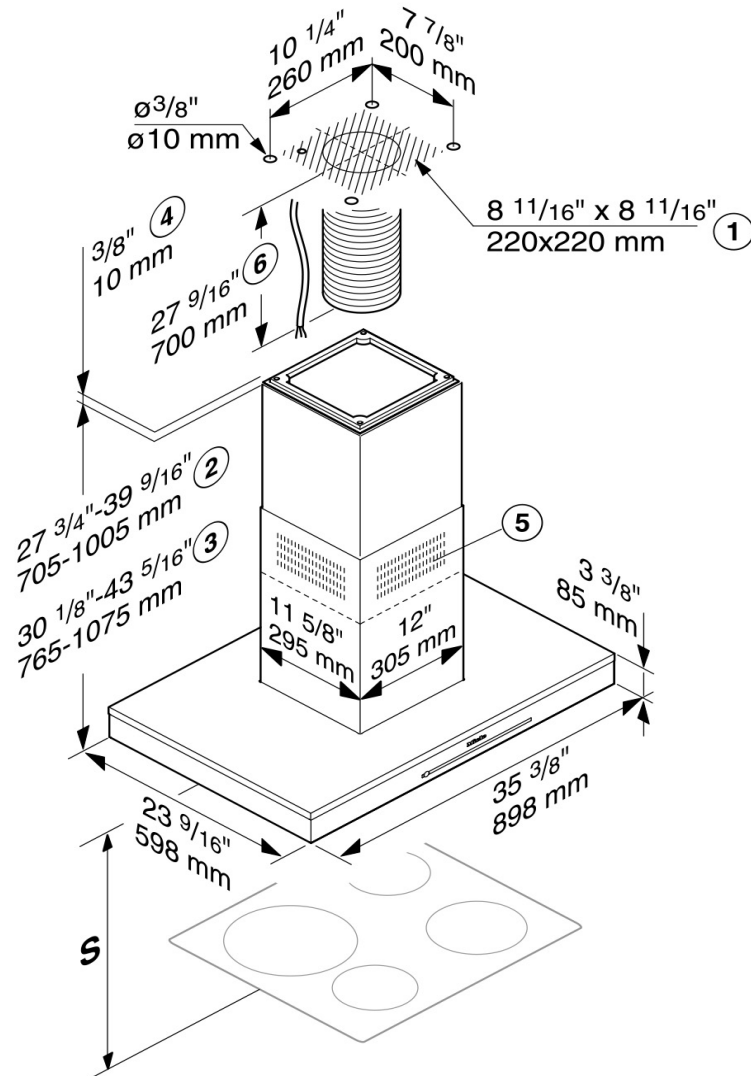

- ① Mounting area for the exhaust ducting and power cable. In recirculation mode, only the power cord is required.
- ② Possible height range for appliance in vented mode
- ③ Possible height range for appliance in recirculation mode
- ④ Alternative installation with spacer frame
- ⑤ Air vent positioned at the top for recirculation
- ⑥ A power cord is required to connect the hood to the power supply (Power cord is not supplied). With extraction mode flexible ductin is also required.

Exhaust connection \varnothing 6" (150 mm)

S - Distance between cooktop and ventilation hood. Please see manual for further detail.