

Puristic Wall Ventilation Hood

DA 6690 W OBSW



Puristic Wall Ventilation Hood DA 6690 W OBSW



DA 6690 W HVBR

Features:

- LED ClearView lighting
- Con@ctivity - communication between hood and cooktop
- Touch on Glass controls
- Four fan speeds (incl. intensive)
- Removable dishwasher-safe stainless steel grease filter
- Filter saturation indicator (grease and charcoal filters)
- Delayed shutdown for 5 or 15 minutes
- Automatic shutdown of intensive level, programmable for 10 minutes

SPECIFICATIONS


DA 6690 W OBSW — Item 28669040USA

| | |
|---------------------------|---|
| Max CFM | 625 CFM |
| Canopy Dimensions | 35 ³ / ₈ " (898mm) W x 3 ³ / ₈ " (85mm) H x 19 ¹ / ₁₆ " (500mm) D |
| Vented Height | 28" (710mm) - 40 ⁹ / ₁₆ " (1030mm) |
| Recirculation Height | 33 ¹ / ₁₆ " (840mm) - 45 ¹¹ / ₁₆ " (1160mm) |
| Chimney Dimensions | 11 ³ / ₈ " (290mm) W x 10 ⁵ / ₈ " (270mm) D |
| Electrical | |
| Electrical Requirements | 120 V, 60 Hz, 15 Amps |
| Power Cord | NEMA 5-15 molded plug, Length 2.5 ft (0.75m) |
| Exhaust Duct | |
| Recommended Duct Diameter | 6" (150mm) |
| Shipping | |
| Shipping Weight | 57.2 lbs (26kg) |
| Support | |
| Call Miele | 800.843.7231 |
| Miele Website | www.mieleusa.com |
| 20/20 Link | 2020technologies.com |

Puristic Wall Ventilation Hood DA 6690 W OBSW



PRODUCT VIEW

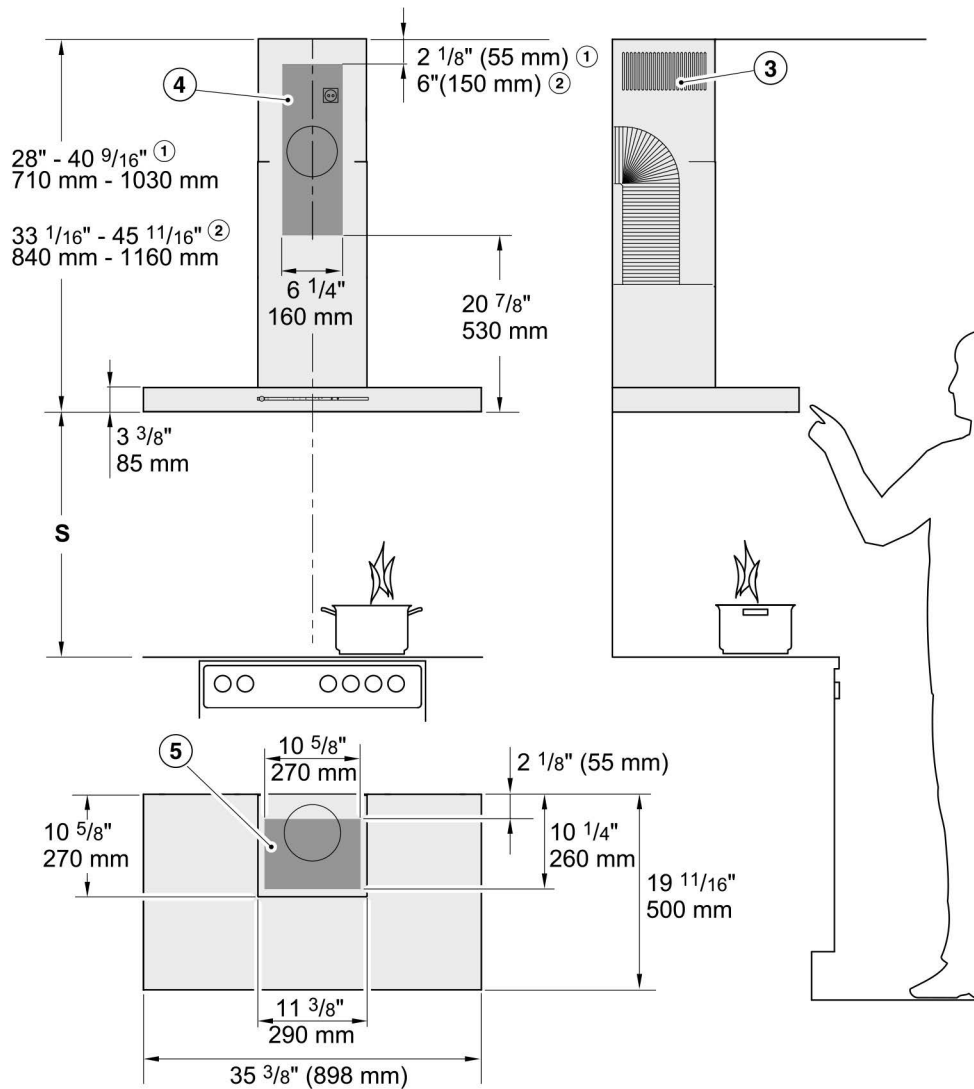

The drawing is not to scale.

- ① Extraction
- ② Recirculation
- ③ Air vent positioned at top for recirculation
- ④⑤ Mounting area (only ④ is required for recirculation hoods). Wall and ceiling area for exhaust duct opening and for wall receptacle installation. Placement of receptacle on wall is required for recirculating hoods.

Vent collar \varnothing 6" (150 mm), with adapter \varnothing 5" (125 mm).

S - Distance between cooktop and ventilation hood. Please see manual for further detail.