

HR 1422-3 I 30" Induction Range

Features:

- Turn dial operation with display –DirectSelect
- State-of-the-art cooktop technology – four induction cooking zones
- Fast heating time and even heat distribution – TwinPower
- Minimal cleaning effort – Selfcleaning
- Easy opening & closing – noise and vibration absorbers

Included:

- 1x Pyrofit (self clean ready) Wire Rack
- 1x Pyrofit (self clean ready) Telescopic Rack
- 1x PerfectClean Baking Tray




MATERIAL

12298850


SPECIFICATIONS	
Overall Unit Dimensions	29 15/16" (760 mm) W x 35 1/2" – 37" (902 – 940 mm) H x 26 1/2" (678 mm) D [Depth to control panel]
Niche	
Minimum Cabinet Niche Opening	30" (762 mm) W x 35 1/2" (902 mm) H
Electrical	
Electrical Requirements	120/208-240V, 60Hz, 50 Amps
Power Cord	NEMA 14-50 plug, 5 ft (1.52 m)
Shipping	
Shipping Weight	307 lbs (140 kg)

PRODUCT DIMENSIONS

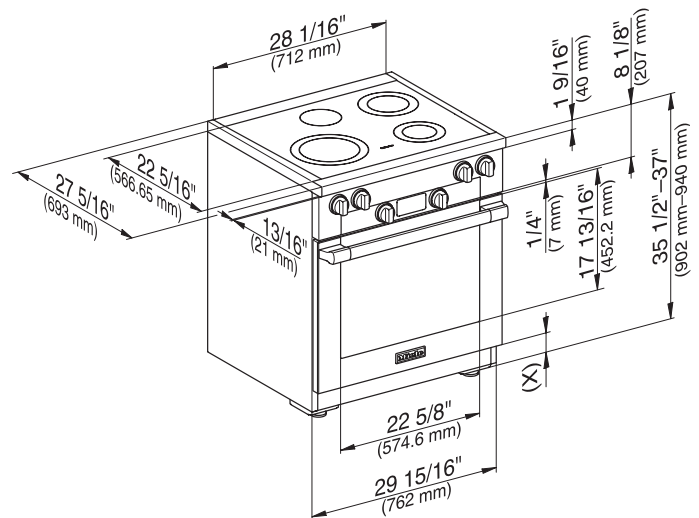


ADDITIONAL PRODUCT DIMENSIONS

Rear View

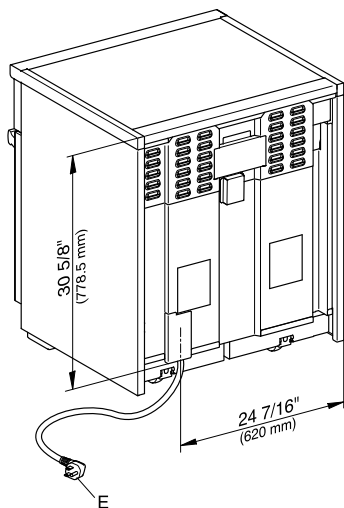


E = Electrical connection

Side View

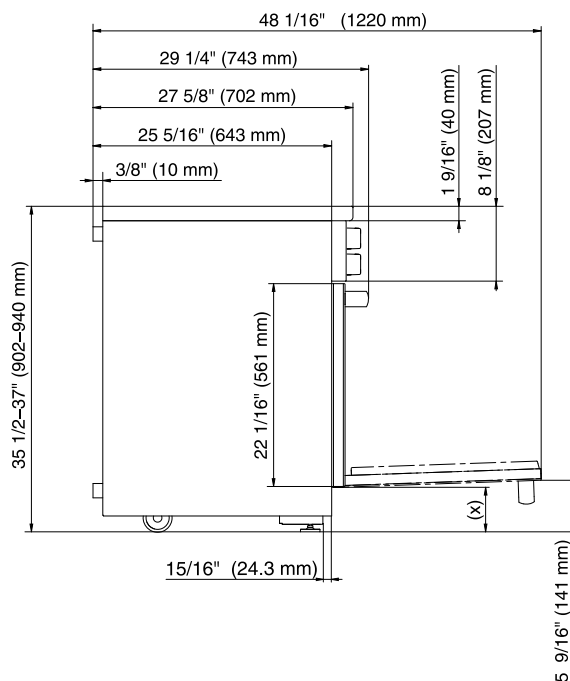

(X) Depending on the appliance height adjustment: 5"-6 1/2" (127-165.1 mm)


Bullnose Details

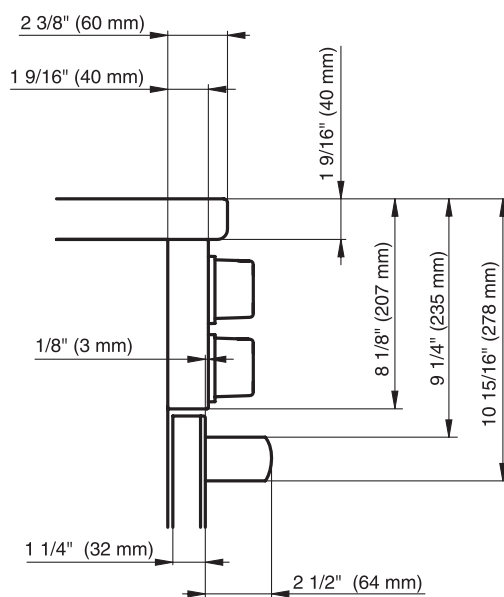

NICHE DETAILS

Induction 30" Range Cooking Zones

4-6 ¹ / ₄ " diameter	1,250-2,000W (208V) 1,450-2,300W (240V)
5 ¹ / ₂ -7 ³ / ₄ " diameter	1,700-2,700W (208V) 1,950-3,100W (240V)
6 ¹ / ₄ -9" diameter	2,100-3,500W (208V) 2,400-3,850W (240V)
7-11" diameter	2,300-3,350W (208V) 2,700-3,850W (240V)
Total Power Output	6,700W (208V) 7,700W (240V)

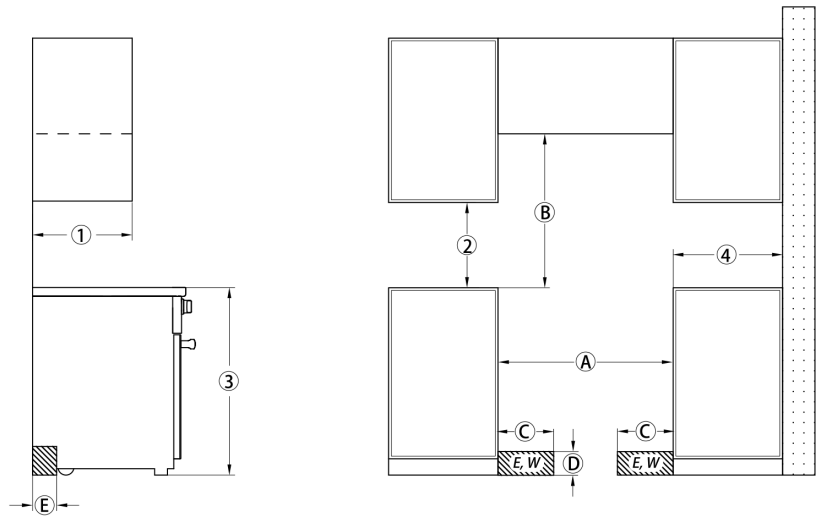

©, ©, © The shaded area represents the installation area for the connections:

E = Electrical connection,

W = Water connection (only HR 1622)

PAIRING WITH A HOOD FAN

Unlike all-gas and DF ranges, induction ranges do not necessitate installation of a range hood (DAR) above due to different heat transfer characteristics.

Miele HR 1422-3 I and HR 1622-3 I Induction Ranges can be paired with any other fan type 30" or wider.

Position	Dimensions	Description	
①	13" (330 mm)	Maximum depth of top cabinet	
②	18" (547 mm)	Minimum distance to bottom edge of top cabinet	
③	35 1/2"-37" (901-940 mm)	Distance from the floor to cooktop surface	
Ⓐ	min. 30" (762 mm)	Niche width	
Ⓑ	30" (762 mm)	Minimum distance between the top of the cooking area and the bottom of an unprotected combustible surface.	
	or 24" (609 mm)	Minimum distance to a protected combustible surface or when a Miele Ventilation Hood is installed.	
	For all other hoods please consult the manufacturer's specifications for required distances.		
Ⓒ	approx. 10 13/16" (274 mm)	Maximum connection width right and left	Position of the wall socket
Ⓓ	approx. 4 1/2" (115 mm)	Maximum connection height	
Ⓔ	approx. 2 13/16" (72 mm)	Maximum connection depth	