



Under Counter Wine Storage System KWT 6312 UGS






KWT 6312 UGS Features:

- Built-under unit
- Tinted tempered glass door
- Push2open door
- · SoftClose door
- Right hinged, convertible
- DynaCool
- Room for up to 46 bottles*
- Single temperature panel
- TouchControl interface
- LED lighting
- · Active AirClean filter
- Low vibration compressor
- FlexiFrame with Noteboard
- Sommelier set
- Side-by-Side combination available


SPECIFICATIONS	
KWT 6312 UGS — Item 36631200USA	
Overall Unit Width	23 ⁷ / ₁₆ " (596mm)
Overall Unit Height	32 ¹ / ₄ " — 34 ¹ / ₄ " (819 — 870mm)
Overall Unit Depth	22 ¹ / ₂ " (571mm)
Door Clearance	23 ⁷ / ₁₆ " (596mm)
Niche	
Minimum Cabinet Opening Width	23 ⁵ / ₈ " (600mm)
Minimum Cabinet Opening Height	32 ⁵ / ₁₆ " (820mm)
Minimum Cabinet Opening Depth	24" (610mm)
Interior Volume	
Wine Cooling Volume	3.9 cu-ft (110 L)
Bottle Capacity Based on Borderaux Bottles	46 Bottles *Without Sommelier Set
Operational Altitudes	
High Altitude	Miele Undercounter Wine will function up to 4900 ft (1500 m) in altitude. At altitudes above 4900 ft (1500 m) there is a risk of the glass door breaking due to changed air pressure conditions.
Electrical	
Electrical Requirements	110V / 120V, 60Hz, 15 Amps (single) 110V / 120V , 60Hz, 20Amp (side-by-side)
Power Cord	NEMA 5-15 plug, 6' 63/4" (2m)
Shipping	
Shipping Weight	110 lbs. (50 kg)
Shipping Weight w/ Sommelier Set	135.6 lbs. (61.5 kg)
Support	
Call Miele	800.843.7231
Miele Website	[™] www.mieleusa.com
20/20 Link	⁴2020technologies.com



Installation Dimension

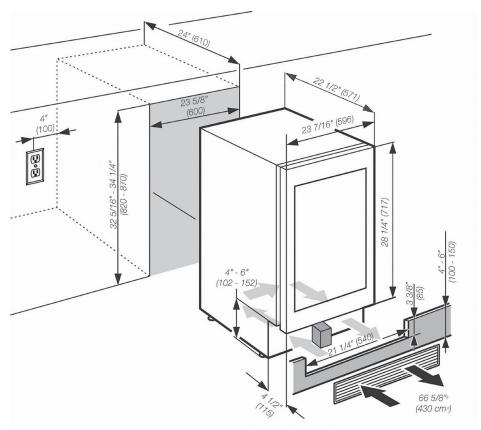

Top View

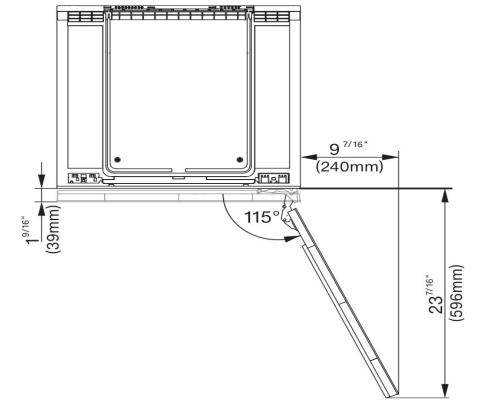

KWT 6312 UGS Page 3 of 4

Under Counter Wine Storage System KWT 6312 UGS



Installation Dimension Side-by-side Combination

