

ContourLine 24" Combi-Steam Oven

DGC 6500 XL



ContourLine Combi-Steam Oven

DGC 6500 XL



DGC 6500 XL

Features:

- SensorTronic controls: 5-line TFT display with laterally positioned sensor controls that clearly present menu content.
- MultiSteam technology delivers powerful external steam generation and optimum steam distribution via 6 inlet ports
- Wired roast probe for perfect roasting
- 3-in-1 appliance
 1. True European convection oven
 2. Steam oven
 3. Combination of steam and convection oven
- MasterChef menu offer over 150 food types to cook to perfection
- XL stainless steel cavity
- Lift up control panel conceals water and condensate container (both containers are dishwasher-safe)
- ComfortSwivel handle moves with the motion of your wrist, creating a more ergonomic feel when opening and closing the oven door

SPECIFICATIONS

DGC 6500 XL — Item 23650052USA

Overall Fascia Dimensions 23⁷/₁₆" (595 mm) W x 18" (455.5 mm) H x 7⁷/₈" (23 mm) D

Overall Unit Width - Excluding Fascia Dimension 21⁹/₁₆" (548 mm)

Overall Unit Height - Excluding Fascia Dimension 17¹¹/₁₆" (449 mm)

Overall Unit Depth - Excluding Fascia Dimension 21⁵/₈" (550 mm)

Oven Door Clearance 13¹/₁₆" (332 mm)

Built-In

Minimum Cabinet Width 22¹/₁₆" (560 mm)

Minimum Cabinet Depth 21⁷/₈" (555 mm)

Minimum Opening Height 17¹¹/₁₆" (450 mm)

Minimum Base Support 60 lbs

Additional Cut-outs Required Venting cut-out required
19¹¹/₁₆" x 1⁹/₁₆" (500 x 40 mm)

Electrical

Electrical Requirements 240V, 60Hz, 20A

Power Cord Molded plug - NEMA 6-20, 240V power cord
5 ft (1.5 m)

Shipping

Shipping Weight 65 lbs

Shipping Dimensions 26⁷/₃₂" (666 mm) W x 21⁵/₈" (549 mm) H x 23¹/₁₆" (535 mm) L

Support

Call Miele 800.843.7231

Miele Website www.mieleusa.com

20/20 Link 2020technologies.com

ContourLine Combi-Steam Oven

DGC 6500 XL



HANDLE SPECIFICATIONS

Comfort Handle:
Optional with ContourLine
(DS 6708 Item #09828380)

ComfortSwivel Handle:
Standard with ContourLine
Optional for PureLine
(DS 6718 Item # 09828390)

22"
(559mm)

1 5/8"
(33mm)

2 1/8"
(51mm)

Silhouette Handle:
Standard with Pureline
Optional for Contourline
(DS 6808 Item # 09828400)

22"
(559mm)

1 5/8"
(33mm)

1 5/8"
(41mm)

1 5/8"
(33mm)

1/2"
(12.7mm)

1 5/8"
(41mm)

Silhouette Handle (Chrome):
Standard with BrilliantWhite
(DS 6808 Item # 09828410)

Silhouette Handle:
Standard with Truffle Brown
(DS 6808 Item # 09870690)


ContourLine Combi-Steam Oven

DGC 6500 XL




PRODUCT VIEWS

Isometric View

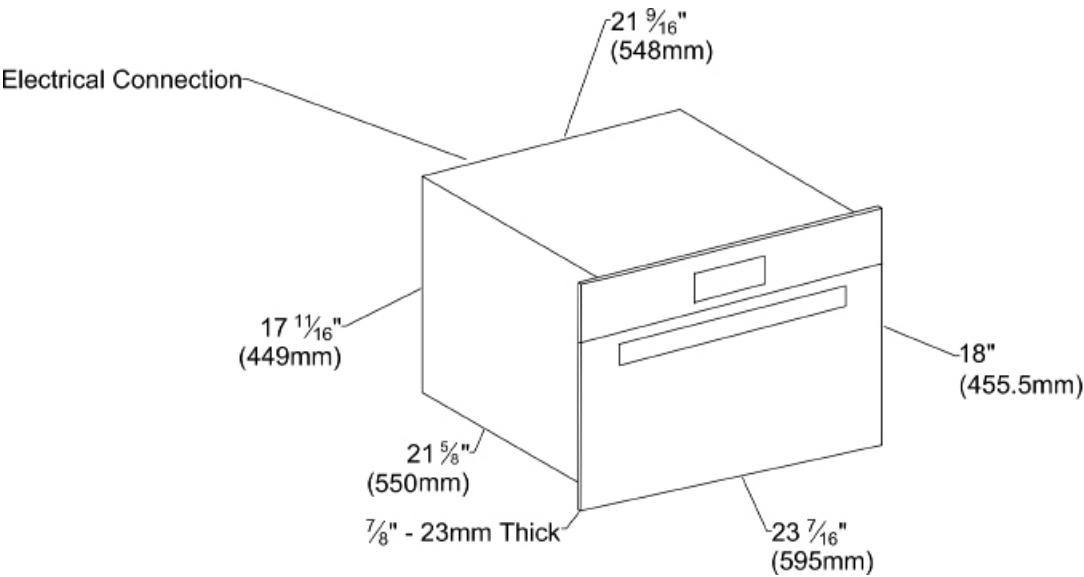

Front View

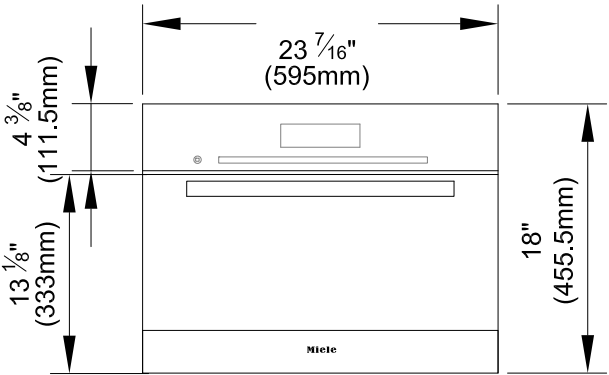


ContourLine Combi-Steam Oven

DGC 6500 XL




INSTALLATION SPECIFICATIONS

Top View, Door Open

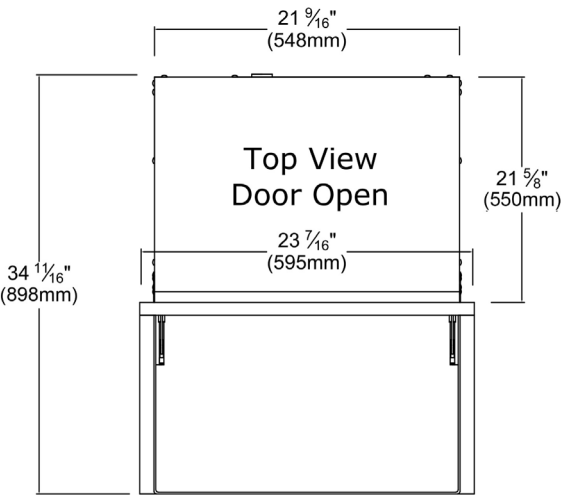

Side View

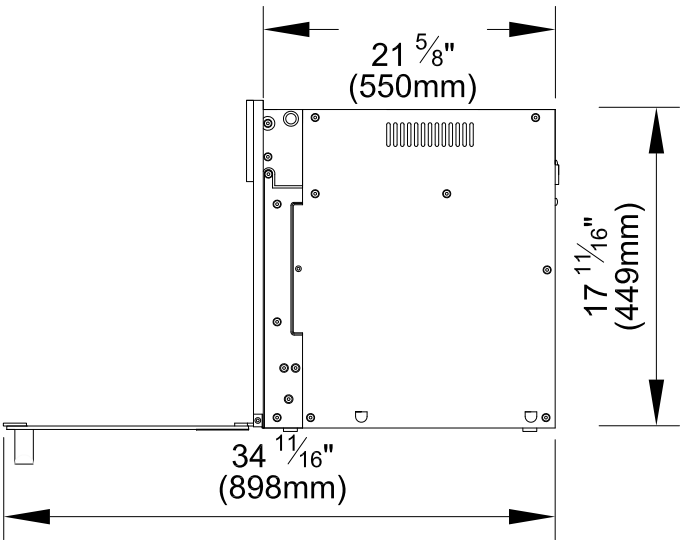


ContourLine Combi-Steam Oven DGC 6500 XL



INSTALLATION SPECIFICATIONS


Door Swing and Face Detail

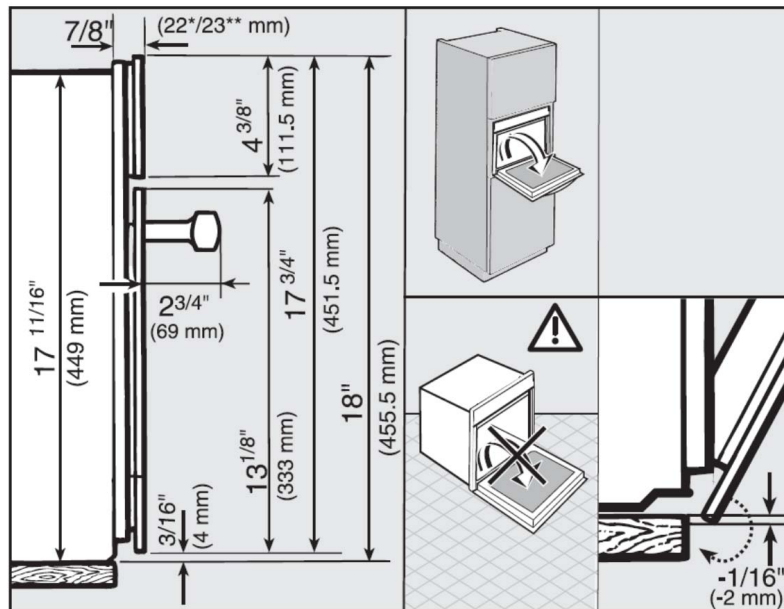

* Appliances with glass front

** Appliances with metal front

Control Panel Swivel View

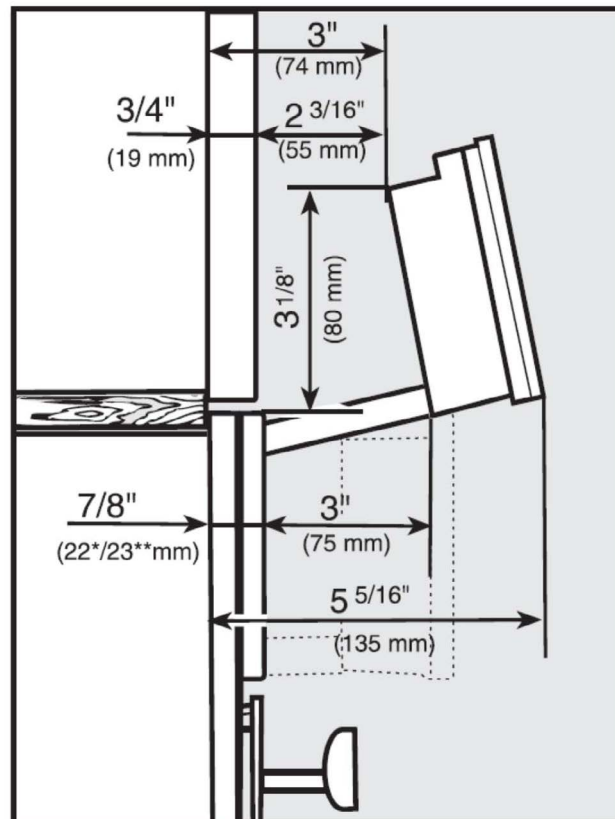

ContourLine Combi-Steam Oven DGC 6500 XL




INSTALLATION SPECIFICATIONS


Tall Cabinet Installation

- ① Combi Steam Oven
- ② Installation niche
- ③ Power supply to the appliance
- ④ Recommended location for electrical connection
- ⑤ Power cord

* Appliances with glass front
** Appliances with metal front

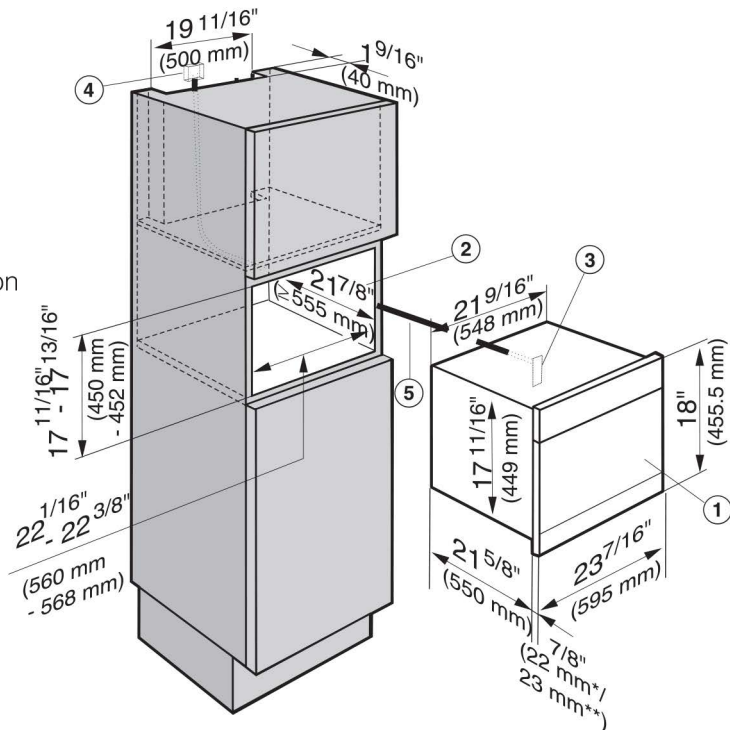

Tall Cabinet Installation — Venting Requirements

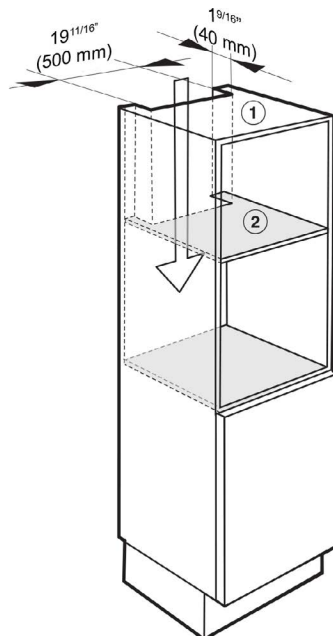

To ensure that the Combi Steam Oven has adequate ventilation, the following cut-outs measuring $19 \frac{11}{16}'' \times 1 \frac{9}{16}''$ (500 x 40 mm) must be made:

- ① in the top of the cabinet
- ② in the center shelf above the installation niche


The cabinet housing must not have a back panel fitted behind the installation niche.

ContourLine Combi-Steam Oven DGC 6500 XL




INSTALLATION SPECIFICATIONS

Installation Above 24" Oven

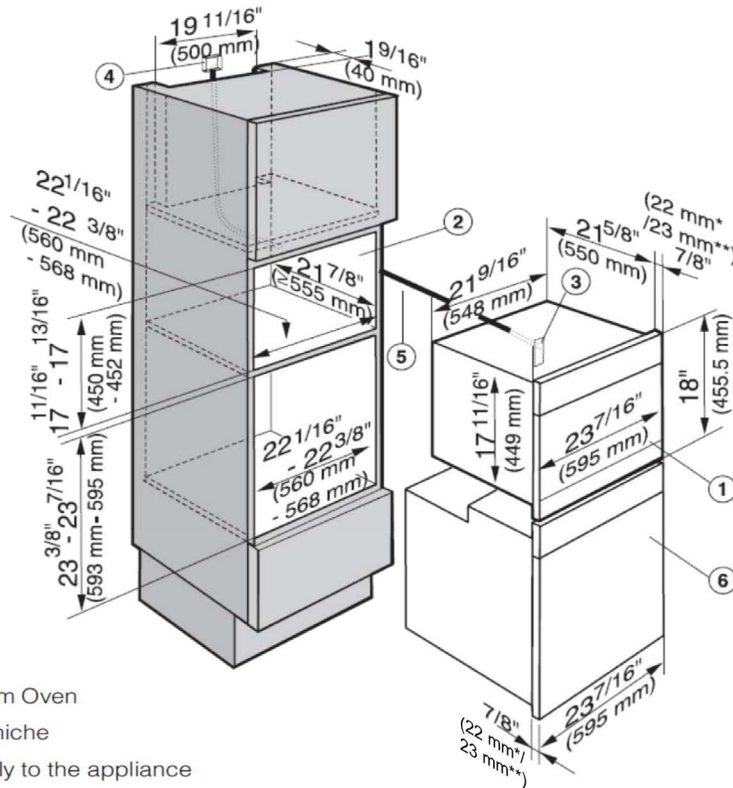

- ① Combi Steam Oven
- ② Installation niche
- ③ Power supply to the appliance
- ④ Recommended location for electrical connection
- ⑤ Power cord
- ⑥ Oven

Installation Above 24" Oven —
Venting Requirements

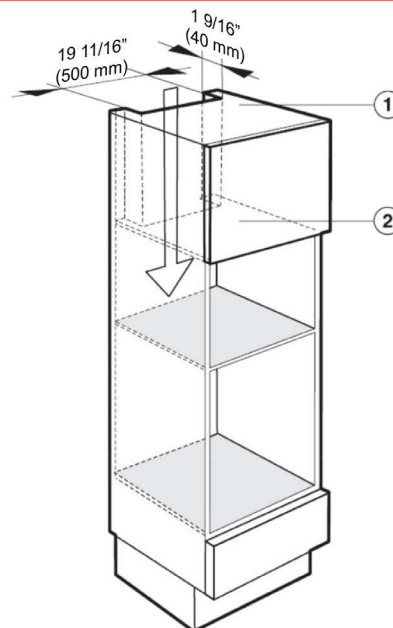

To ensure that the Combi Steam Oven has adequate ventilation, the following cut-outs measuring 19 11/16" x 1 9/16" (500 x 40 mm) must be made:

- ① in the top of the cabinet
- ② in the center shelf above the installation niche

The cabinet housing must not have a back panel fitted behind the installation niche.


Cut-out for venting the oven:
Please refer to the installation instructions for the oven.

ContourLine Combi-Steam Oven DGC 6500 XL




INSTALLATION SPECIFICATIONS

Installation Above Warming Drawer

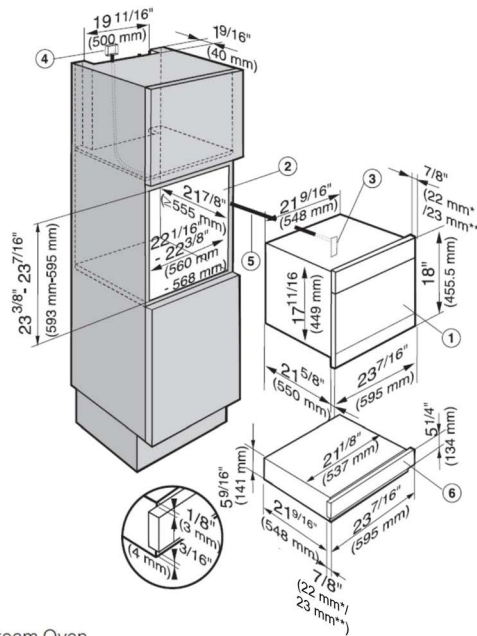

- ① Combi Steam Oven
- ② Installation niche
- ③ Power supply to the appliance
- ④ Recommended location for electrical connection
- ⑤ Power cord
- ⑥ Warming drawer

Installation Above Warming Drawer — Venting Requirements

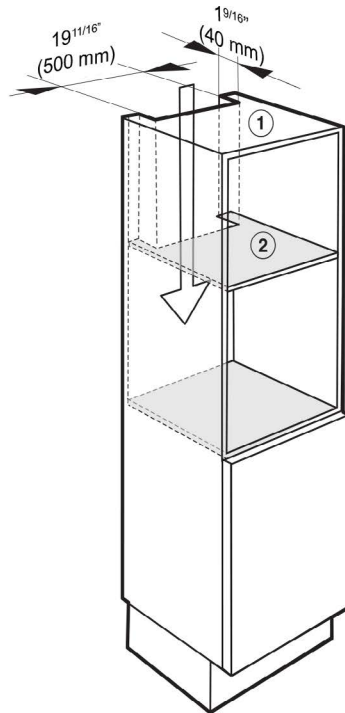

To ensure that the Combi Steam Oven has adequate ventilation, the following cut-outs measuring 19 11/16" x 1 9/16" (500 x 40 mm) must be made:

- ① in the top of the cabinet
- ② in the center shelf above the installation niche


The cabinet housing must not have a back panel fitted behind the installation niche.

ContourLine Combi-Steam Oven DGC 6500 XL



INSTALLATION SPECIFICATIONS

Installation Undercounter

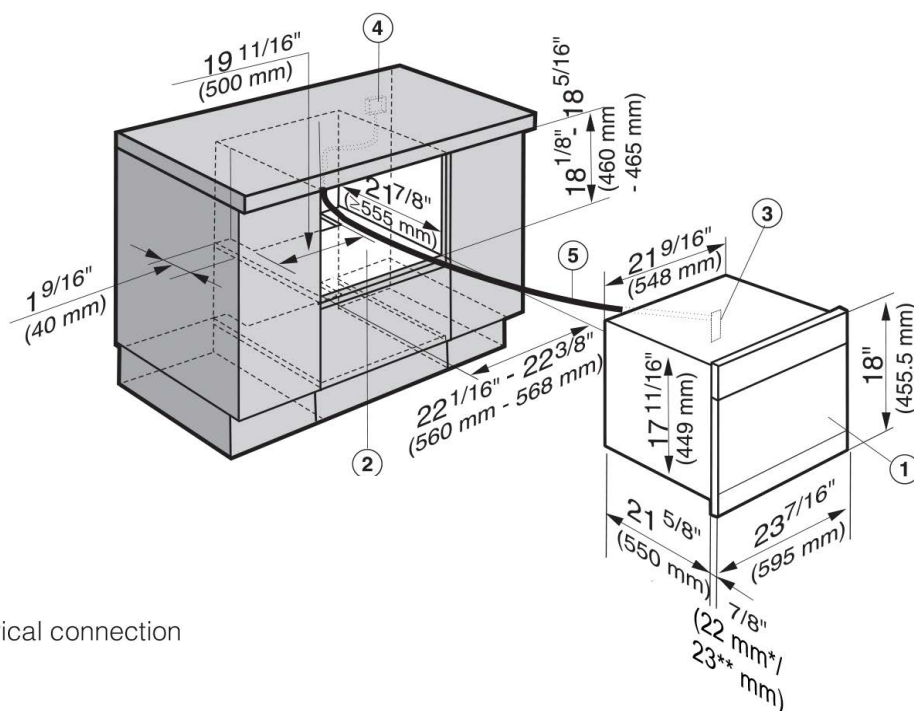


- ① Combi Steam Oven
- ② Installation niche
- ③ Power supply to the appliance
- ④ Recommended location for electrical connection
- ⑤ Power cord

* Appliances with glass front

** Appliances with metal front

If the appliance is to be installed under a cooktop, observe the instructions for installation of the cooktop and its installation height.

Installation Undercounter — Venting Requirements

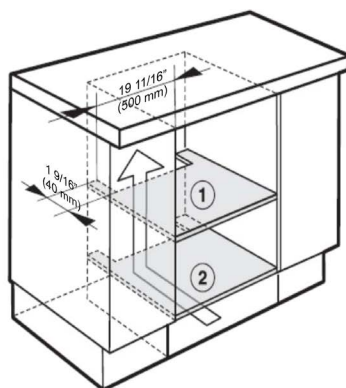

To ensure that the Combi Steam Oven has adequate ventilation, the following cut-outs measuring 19 11/16" x 1 9/16" (500 x 40 mm) must be made:

- ① in the appliance support base
- ② in the bottom of the cabinet space below

The cabinet housing must not have a back panel fitted behind the installation niche.