

ContourLine Plumbed Combi-Steam Oven

DGC 6705 XL



ContourLine Plumbed Combi-Steam Oven

DGC 6705 XL



DGC 6705 XL

Features:

- M Touch innovative and revolutionary controls are both easy-to-operate and navigate. An intuitive swipe of the screen will quickly lead you to your desired selection.
- MultiSteam technology delivers powerful external steam generation and optimum steam distribution via 6 inlet ports
- Wired roast probe for perfect roasting
- 3-in-1 appliance
 1. True European convection oven
 2. Steam oven
 3. Combination of steam and convection oven
- MasterChef and MasterChef Gourmet menus offer over 150 food types to cook to perfection
- XL stainless steel cavity
- Lift up control panel conceals water and condensate container (both containers are dishwasher-safe)
- ComfortSwivel handle moves with the motion of your wrist, creating a more ergonomic feel when opening and closing the oven door

SPECIFICATIONS

DGC 6705 XL — Item 23670552USA

Overall Fascia Dimensions	23 ⁷ / ₁₆ " (595 mm) W x 18" (455.5 mm) H x 7 ⁷ / ₈ " (23 mm) D
Overall Unit Width - Excluding Fascia Dimension	21 ⁹ / ₁₆ " (548 mm)
Overall Unit Height - Excluding Fascia Dimension	17 ¹¹ / ₁₆ " (449 mm)
Overall Unit Depth - Excluding Fascia Dimension	21 ⁵ / ₈ " (550 mm)
Oven Door Clearance	13 ¹ / ₁₆ " (332 mm)
Depth with door open	34 ¹¹ / ₁₆ " (898 mm)

Built-In

Minimum Cabinet Width	22 ¹ / ₁₆ " (560 mm)
Minimum Cabinet Depth	21 ⁷ / ₈ " (555 mm)
Minimum Opening Height	17 ¹¹ / ₁₆ " (450 mm)
Minimum Base Support	60 lbs

Additional Cut-outs Required	Venting and plumbing cut-out required 19 ¹¹ / ₁₆ " x 1 ⁹ / ₁₆ " (500 x 40 mm)
------------------------------	--

Plumbing

Water Supply Requirements	Connect to a cold water supply only. Must be connected to a shut-off valve. The water shut-off valve must be accessible after installation. The water pressure must be between 14.5 psi (1 bar) and may not exceed 87.02 psi (6 bar). If the pressure is higher than 87.02 psi (6 bar), a pressure reducing valve must be installed. The supplied hose has a length of 59" (1.5 mm). The hose must not be shortened. The entire hose length must not exceed 24'7" (7.5m).
Drainage Requirements	Drain hose loop may be positioned at or above the flood level of the sink or drain board to which it is connect to provide the proper air gap. The top of end the drain hose must not be higher than 19 ¹¹ / ₁₆ " (500 mm) to where it connects to the drain trap. The drain hose must not be shortened. The entire hose length must not exceed 24'7" (7.5 m). See installation manual for additional information.
Plumbed Hose Connection	Supplied hose: flexible braided 59" (1.5 m) with 3/4" BPT fitting for connection to a shut off valve.

Electrical

Electrical Requirements	240V, 60Hz, 20A
Power Cord	Molded plug - NEMA 6-20, 240V power cord 5 ft (1.5 m)

Shipping

Shipping Weight	65 lbs
Shipping Dimensions	26 ⁷ / ₃₂ " (666 mm) W x 21 ⁵ / ₈ " (549 mm) H x 23 ¹ / ₁₆ " (535 mm) L

Support

Call Miele	800.843.7231
Miele Website	www.mieleusa.com
20/20 Link	2020technologies.com




ContourLine Plumbed Combi-Steam Oven DGC 6705 XL



HANDEL DETAILS

Comfort Handle:
Optional with ContourLine




(DS 6708 Item #09828380)



ComfortSwivel Handle:
Standard with ContourLine
Optional for PureLine

(DS 6718 Item # 09828390)

Silhouette Handle:
Standard with Pureline
Optional for Contourline
(DS 6808 Item # 09828400)



Silhouette Handle (Chrome):
Standard with BrilliantWhite
(DS 6808 Item # 09828410)




Silhouette Handle:
Standard with Truffle Brown
(DS 6808 Item # 09870690)

ContourLine Plumbed Combi-Steam Oven DGC 6705 XL




PRODUCT VIEWS

Isometric View

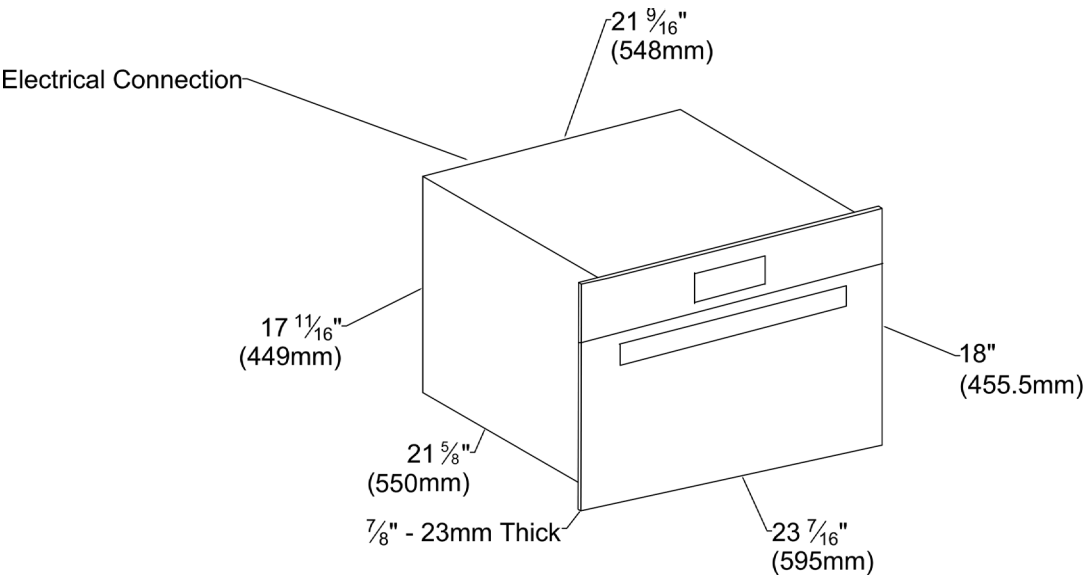

Front View

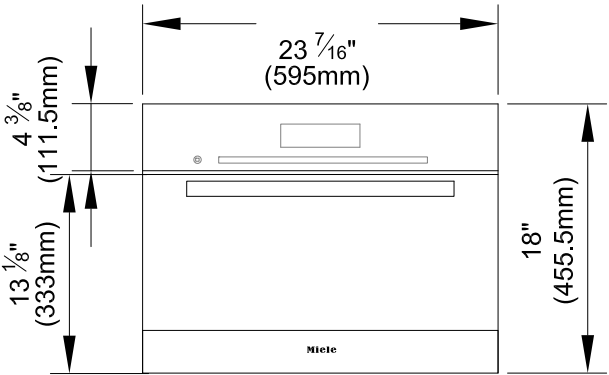


ContourLine Plumbed Combi-Steam Oven

DGC 6705 XL




INSTALLATION SPECIFICATIONS

Top View, Door Open

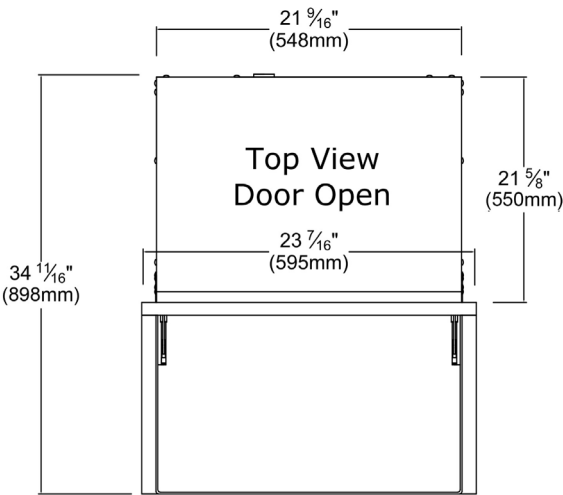

Side View

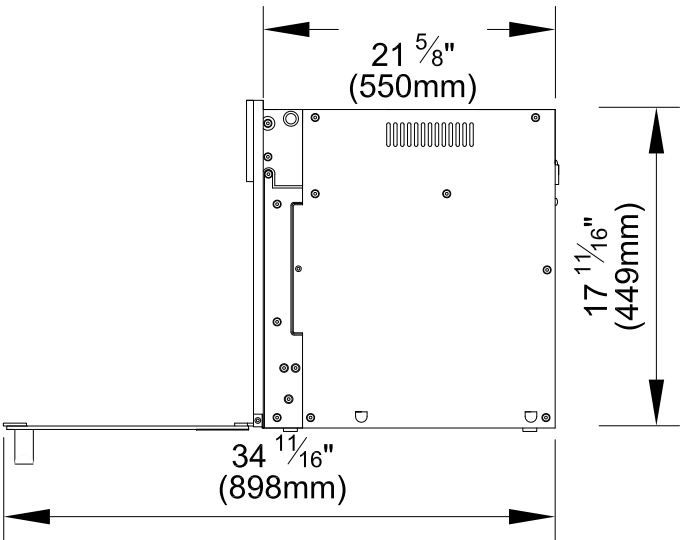


ContourLine Plumbed Combi-Steam Oven DGC 6705 XL




INSTALLATION SPECIFICATIONS

Front Dimension Details

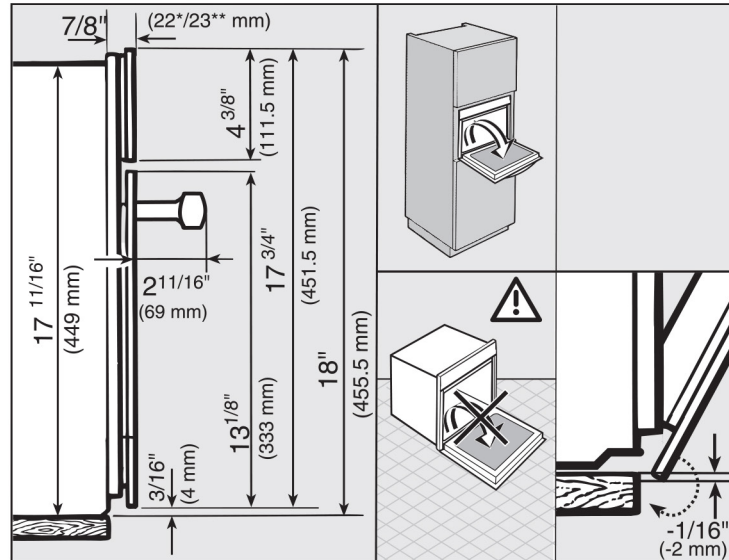


Control Panel Swivel Range

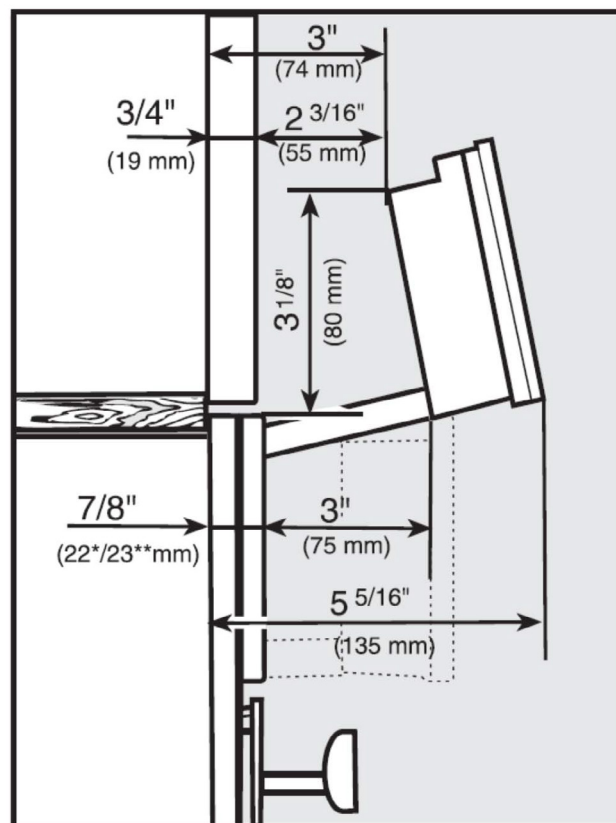

INSTALLATION SPECIFICATIONS

Water Intake / Drain Connection

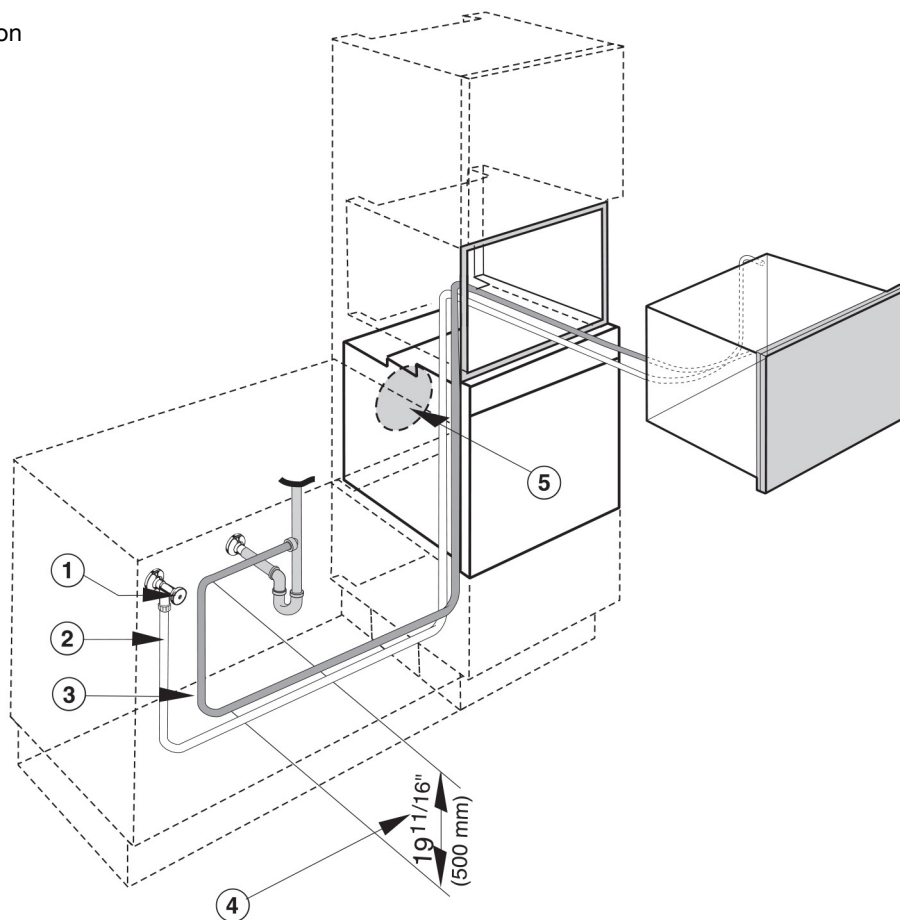


- ① Water supply valve
- ② Water intake hose, L = 59" (1500 mm)
- ③ Drain hose, L = 118" (3000 mm)
- ④ The ascending end of the drain hose to the inlet of the drain trap must not be higher than 19 11/16" (500 mm)
- ⑤ Warning! When installing with an oven the water intake hose and drain hose must not become trapped behind its opening ⑤.

ContourLine Plumbed Combi-Steam Oven DGC 6705 XL



INSTALLATION SPECIFICATIONS

Wall Cabinet Installation

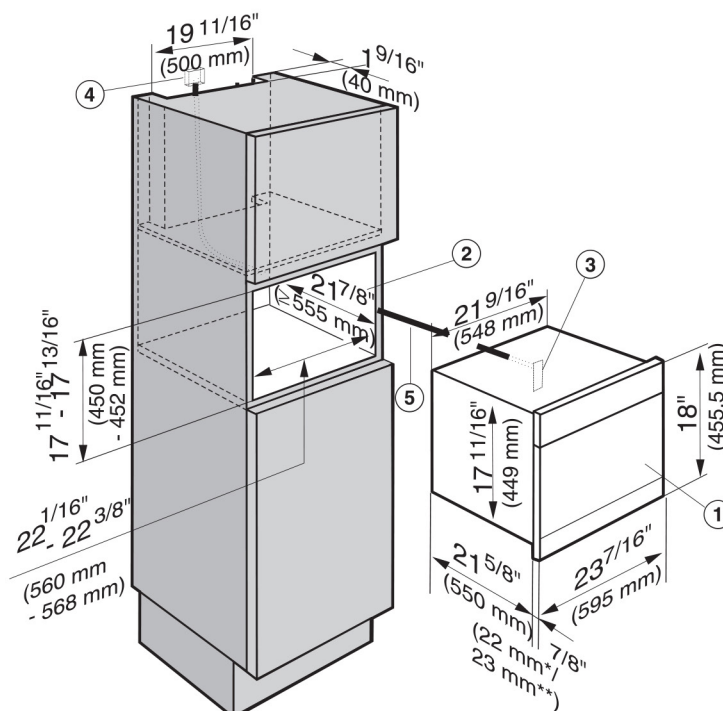


- ① Combi Steam Oven
- ② Installation niche
- ③ Power supply to the appliance
- ④ Recommended location for electrical connection
- ⑤ Power cord

* Appliances with glass front

** Appliances with metal front

INSTALLATION SPECIFICATIONS

Wall Cabinet Installation —
Cut-outs for venting the appliance and
routing of the water hoses

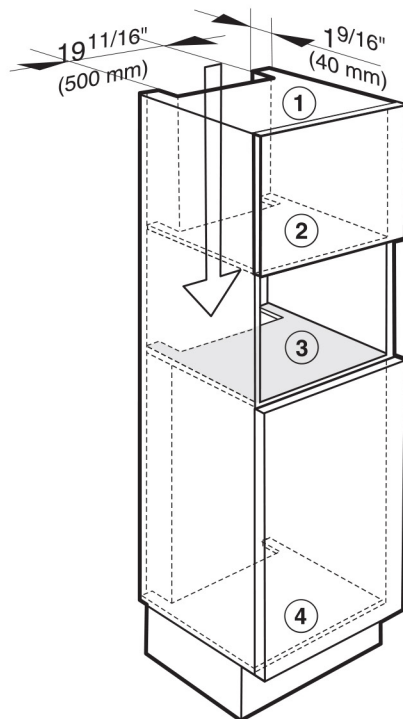

To route the water hoses and to ensure that the Combi Steam Oven has adequate ventilation, the following cut-outs measuring 19 11/16" x 1 9/16" (500 x 40 mm) must be made:

- ① in the top of the cabinet (ventilation)
- ② in the center shelf above the installation niche (ventilation)
- ③ in the appliance support base (water hoses)
- ④ in the bottom of the cabinet (water hoses)

The cabinet housing must not have a back panel fitted behind the installation niche.


ContourLine Plumbed Combi-Steam Oven DGC 6705 XL



INSTALLATION SPECIFICATIONS

Under Counter Installation

If the appliance is to be installed under a cooktop, observe the instructions for installation of the cooktop and its installation height.

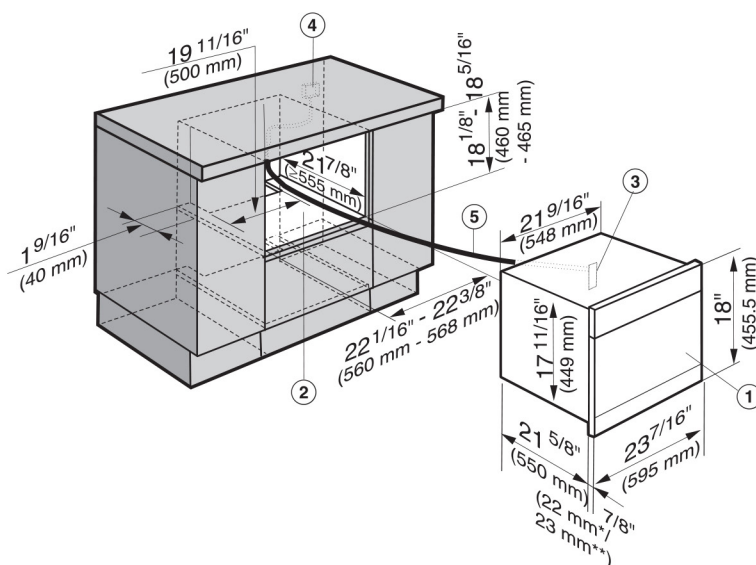

- ① Combi Steam Oven
- ② Installation niche
- ③ Power supply to the appliance
- ④ Recommended location for electrical connection
- ⑤ Power cord

* Appliances with glass front


** Appliances with metal front

ContourLine Plumbed Combi-Steam Oven DGC 6705 XL



INSTALLATION SPECIFICATIONS

Under Counter Installation —
cut-outs for venting the appliance
and routing of the water hoses

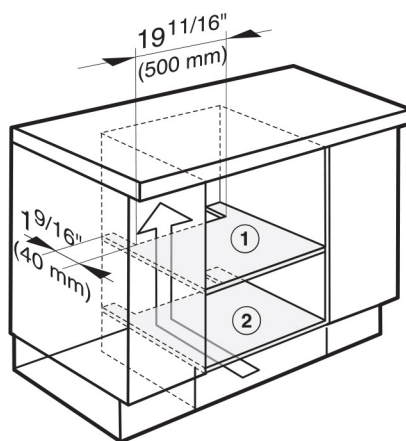

To route the water hoses and to ensure that the Combi Steam Oven has adequate ventilation, the following cut-outs measuring $19\frac{11}{16}" \times 1\frac{9}{16}"$ (500 x 40 mm) must be made:

- ① in the appliance support base
- ② in the bottom of the cabinet space below


The cabinet housing must not have a back panel fitted behind the installation niche.

ContourLine Plumbed Combi-Steam Oven DGC 6705 XL



INSTALLATION SPECIFICATIONS

Installation in Combination with an Oven

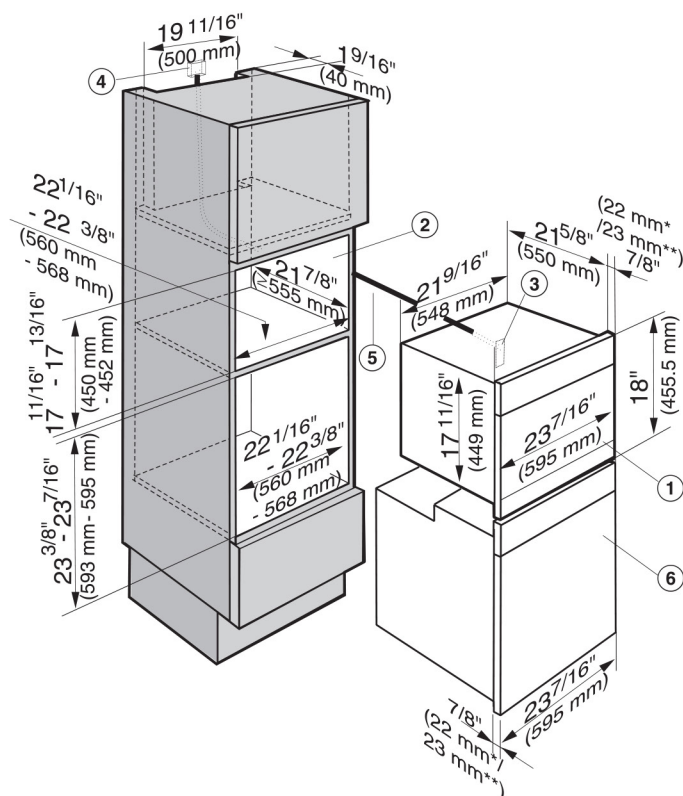


- ① Combi Steam Oven
- ② Installation niche
- ③ Power supply to the appliance
- ④ Recommended location for electrical connection
- ⑤ Power cord
- ⑥ Oven

* Appliances with glass front

** Appliances with metal front

INSTALLATION SPECIFICATIONS

Installation in Combination with an Oven
— cut-outs for venting the appliances and
routing of the water hoses

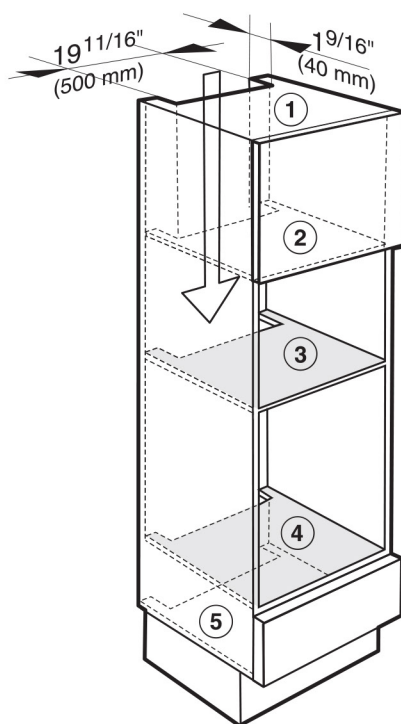

To route the water hoses and to ensure that the Combi Steam Oven has adequate ventilation, the following cut-outs measuring 19 11/16" x 1 9/16" (500 x 40 mm) must be made:

- ① in the top of the cabinet (ventilation)
- ② in the center shelf above the installation niche (ventilation)
- ③ in the appliance support base (water hoses)
- ④ in the appliance support base of the oven (water hoses)
- ⑤ in the bottom of the cabinet (water hoses)

The cabinet housing must not have a back panel fitted behind the installation niche.

Cut-out for venting the oven:


Please refer to the installation instructions for the oven.

ContourLine Plumbed Combi-Steam Oven DGC 6705 XL



INSTALLATION SPECIFICATIONS

Installation in Combination with ESW 6X14

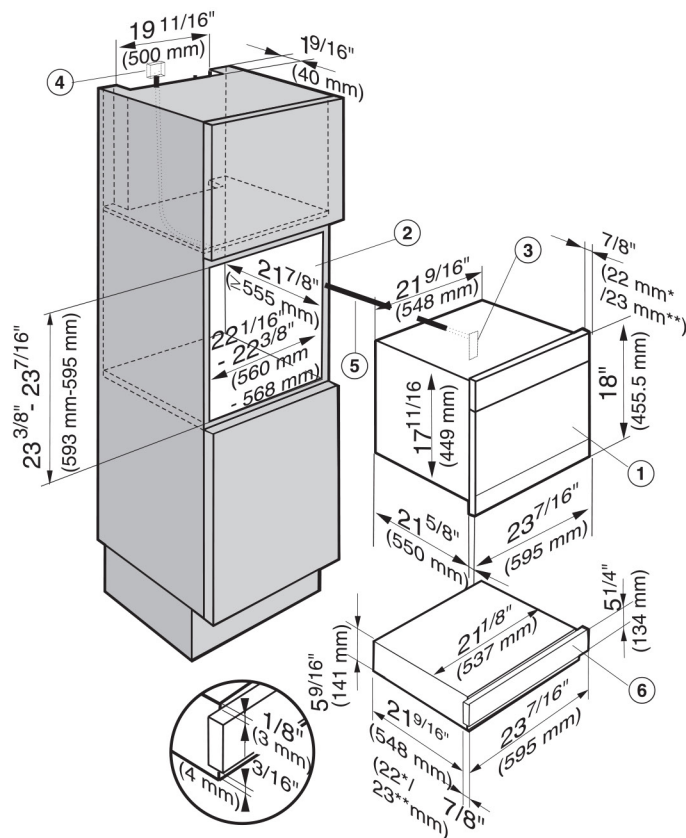


- ① Combi Steam Oven
- ② Installation niche
- ③ Power supply to the appliance
- ④ Recommended location for electrical connection
- ⑤ Power cord
- ⑥ Warming drawer

* Appliances with glass front

** Appliances with metal front

INSTALLATION SPECIFICATIONS

Installation in Combination with an Oven
— cut-outs for venting the appliances and
routing of the water hoses

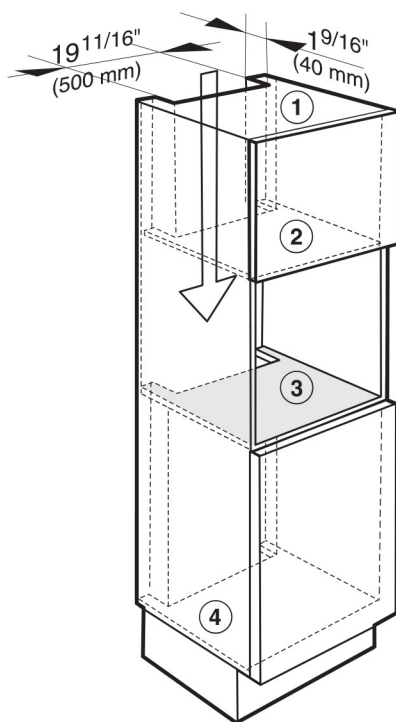

To route the water hoses and to ensure that the Combi Steam Oven has adequate ventilation, the following cut-outs measuring 19 11/16" x 1 9/16" (500 x 40 mm) must be made:

- ① in the top of the cabinet (ventilation)
- ② in the center shelf above the installation niche (ventilation)
- ③ in the appliance support base (water hoses)
- ④ in the bottom of the cabinet (water hoses)

The cabinet housing must not have a back panel fitted behind the installation niche.