

Miele

Slimline Integrated Dishwasher

DIMENSION SLIMLINE G 4720 SCi




ADA
COMPLIANT

Slimline Integrated Dishwasher

SPECIFICATIONS	
Overall Unit Dimensions	17 ⁵ / ₈ " (448mm) W x 32 ¹ / ₁₆ " - 34 ² / ₃ " (814 - 880mm) H x 22 ⁷ / ₁₆ " (570mm) D
Niche	
Minimum Cabinet Opening Dimensions	17 ¹ / ₁₆ " (450mm) W x 32 ¹ / ₈ " (816mm) H X 22 ⁷ / ₁₆ " (570mm) D
Plumbing	
Water Supply Requirements	May be connected to a cold or hot water supply up to a maximum of 140°F/60°C. Must be connected to a shut-off valve with a male 3/8" compression. The water shut-off valve must be accessible after installation. The water pressure must be between 7.25 psi (0.5 bar) and 145 psi (10 bar). If the pressure is higher than 145 psi (10 bar), a pressure reducing valve must be installed.
Water Connection Line	4' 11" (1.5 m) flexible water intake hose is supplied with a 3/8" compression connection.
Drain Hose	4' 11" (1.5 m) flexible drain hose with a 7/8" (22 mm) internal diameter is supplied. The drain hose length must not be longer than 13' 1 1/2" (4 m) and the delivery head must not exceed 3' 3 3/8" (1 m).
Electrical	
Electrical Requirement	110V / 120V, 60Hz, 15 Amps
Power Cord	NEMA 5-15 plug, 4' (1.2 m) (Measured from back of unit, Convertible to Hardwire)
Shipping	
Shipping Weight	107 lbs (48.5 kg)
Shipping Dimensions	40 ¹ / ₈ " W x 38 ¹ / ₈ " H x 20 ⁷ / ₈ " D
Support	
Call Miele	(800) 999-1360
Miele Website	www.mieleusa.com
20/20 Link	2020technologies.com


Custom Panel Ready

Dimension

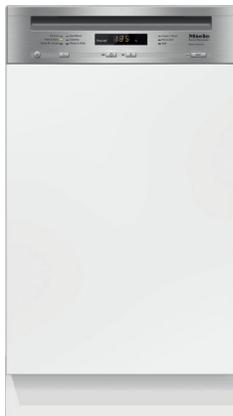

G 4720 SCi
Item 21472057USA

INSTALLATION SPECIFICATIONS

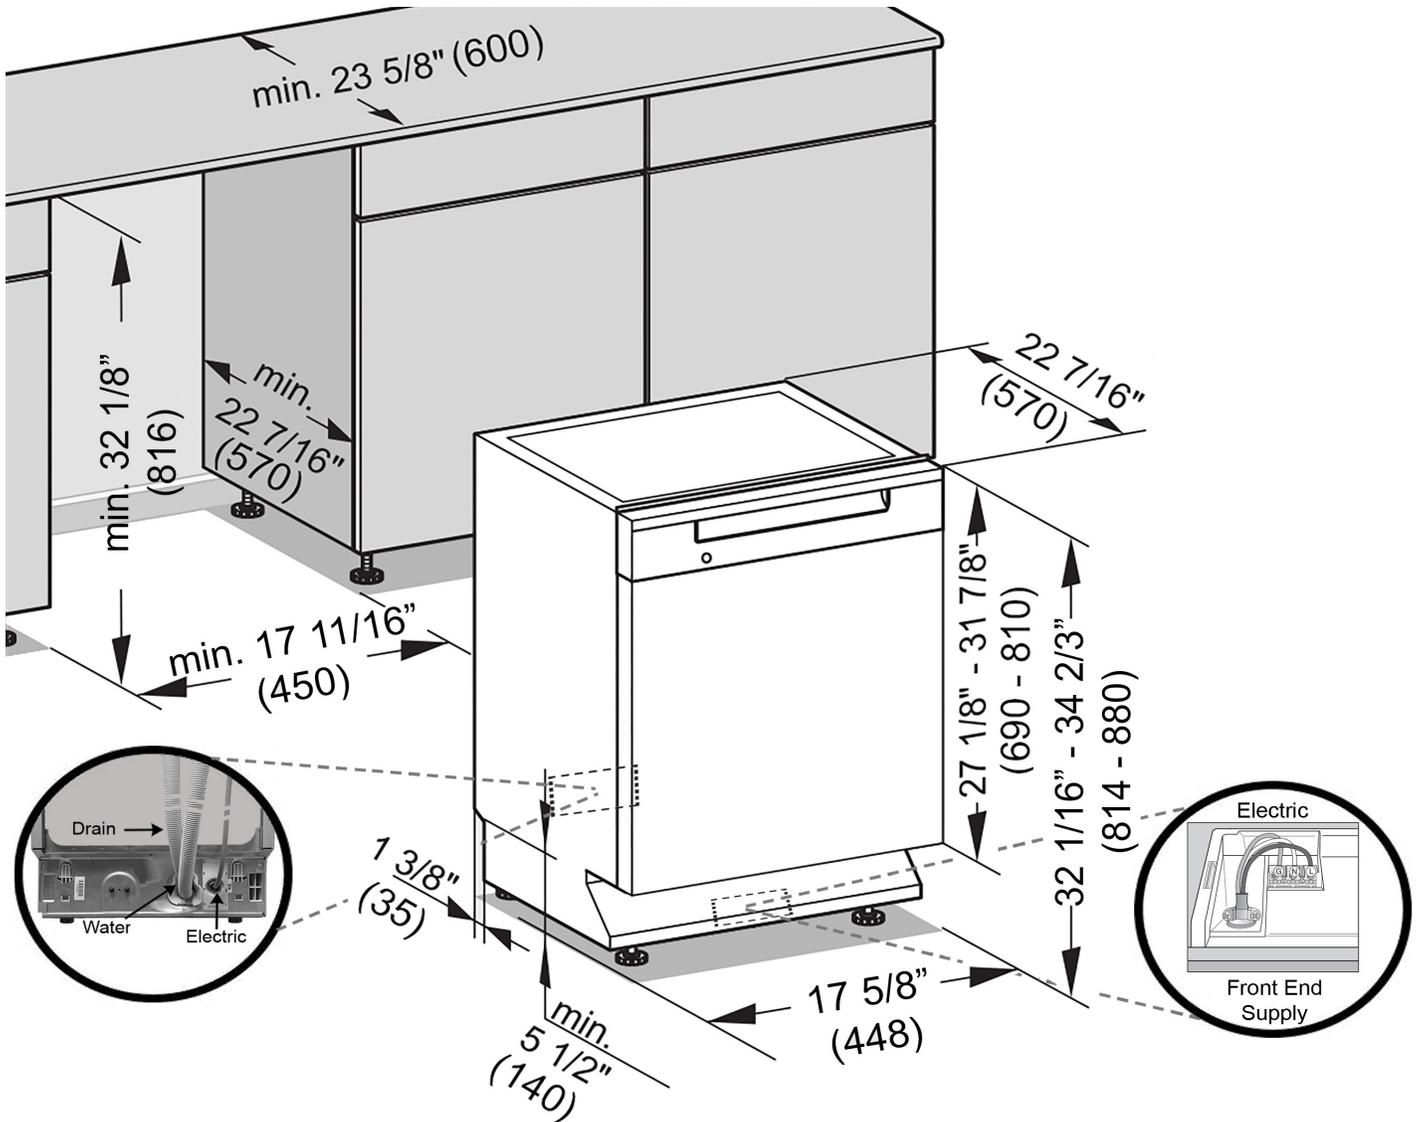


- Drain** - 4 ft 11 in (1.5 m) flexible drain hose.
(Connects from lower center rear)
- Water** - 4 ft 11 in (1.5 m) flexible water intake hose with 3/8" compression fitting.
(Connects from lower center rear)
- Electric** - 4 ft (1.2 m) 120V 15 A 3 wire molded NEMA 5-15 plug power supply.
(Connects via Front End Supply or may be hardwired)

Slimline Integrated Dishwasher

CUSTOM PANEL DETAILS

Some Miele dishwashers do not come equipped with a front panel. These dishwashers are designed to accept a custom door panel supplied by the cabinet maker. Miele has a unique panel integration system which allows the dishwasher to align with the surrounding cabinets.

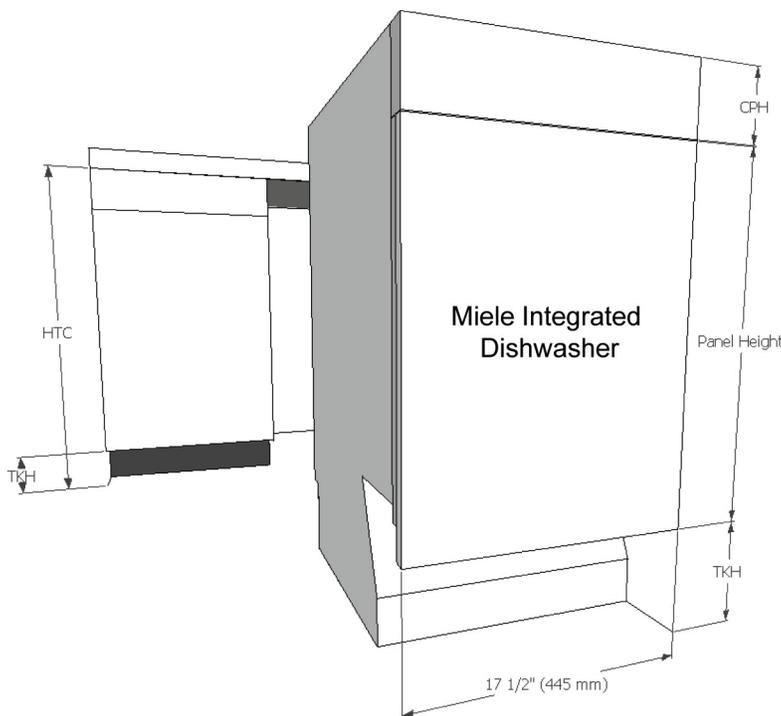

Width: 17 1/2" (445 mm) in all cases
Thickness: 3/4" (19 mm) in all cases
Height: Determined using the following calculation:

$$\text{Panel Height} = \text{HTC} - \text{CPH} - \text{TKH}$$

HTC = Height to the underside of countertop

CPH = Control panel height (**Note**)

TKH = Toe kick height

Note: Control panel height is determined by the height of the adjoining drawers in the cabinets. The height is adjustable between 4 9/16" and 5 7/8" (116-150 mm) with spacer strips provided.

Maximum panel height: 27 1/4" (692 mm)

Minimum panel height: 21 1/4" (540 mm)

Maximum panel weight: 21 Pounds (9.5 kg)

Miele Stainless Steel GFV Panels

Miele offers pre-fabricated stainless steel panels for all integrated units. These panels are designed for various toe-kick heights and offer a choice of handle options. See Miele Product Brochure for more info.

Slimline Integrated Dishwasher


POSSIBLE TOEKICK HEIGHT + CABINET HEIGHT COMBINATION

Height to underside of countertop

	32 1/2	33	33 1/2	34	34 1/2	35	35 1/2	36	36 1/2
2 1/2	Acceptable combinations	Acceptable combinations	Acceptable combinations						
3	Acceptable combinations	Acceptable combinations	Acceptable combinations						
3 1/2	Acceptable combinations	Acceptable combinations	Acceptable combinations	Acceptable combinations					
4	Acceptable combinations	Acceptable combinations	Acceptable combinations	Acceptable combinations	Typical American installation				
4 1/2	Acceptable combinations	With extension feet							
5	Acceptable combinations	With extension feet	With extension feet						
5 1/2	Acceptable combinations	With extension feet	With extension feet	With extension feet					
6	Acceptable combinations	With extension feet	With extension feet	With extension feet	With extension feet				
6 1/2	Acceptable combinations	With extension feet	With extension feet	With extension feet	With extension feet				
7		Acceptable combinations	Acceptable combinations	Acceptable combinations	Acceptable combinations	With extension feet	With extension feet	With extension feet	With extension feet
7 1/2			Acceptable combinations	Acceptable combinations	Acceptable combinations	With extension feet	With extension feet	With extension feet	With extension feet
8				Acceptable combinations	Acceptable combinations	With extension feet	With extension feet	With extension feet	With extension feet
8 1/2					Acceptable combinations	With extension feet	With extension feet	With extension feet	With extension feet
9						With extension feet	With extension feet	With extension feet	With extension feet

- Acceptable combinations
- Typical American installation
- With extension feet

Water Connection

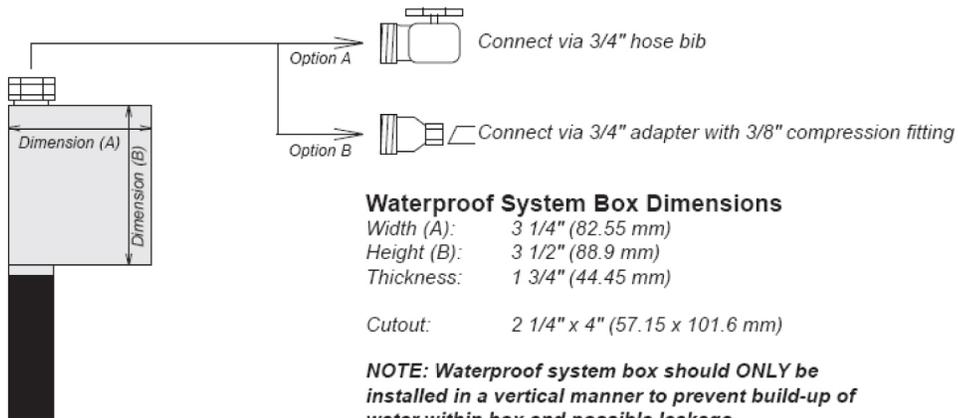

Waterproof System

Temperature: 110° - 140° F (43° - 60° C)

Pressure: 4.35 - 145 psi (0.3 - 10 bar)

Drain hose: 7/8" ID - 5 ft (1.5 m) long