


Product and Cut-out Dimensions Warming Drawer

Page 1 of 3

ESW 4716 Europa Design Clean Touch Steel with a DS 4043 Square Series Handle

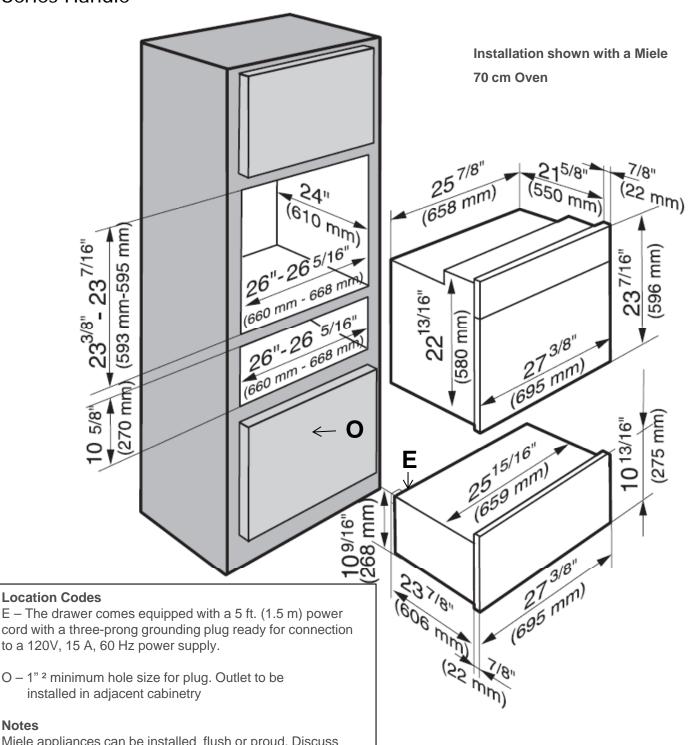

Miele appliances can be installed flush or proud. Discuss your installation requirements with your architect, designer and installer.

All installations must be done in accordance with local codes.

Note: Drawing is not to scale Specification Sheets OJS 11142011




Product and Cut-out Dimensions
Warming Drawer

Page 2 of 3

ESW 4716 Europa Design Clean Touch Steel with a DS 4043 Square Series Handle

# Side view with a Miele oven

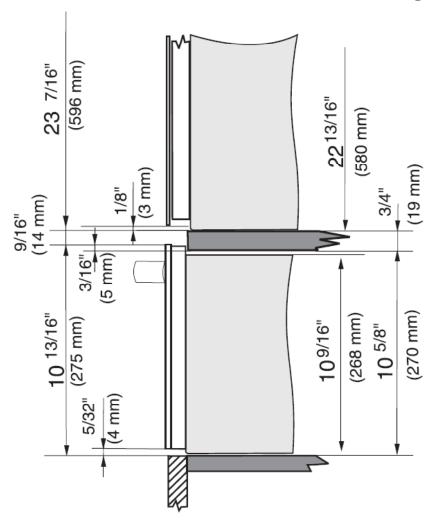

## **Location Codes**

E – The drawer comes equipped with a 5 ft. (1.5 m) power cord with a three-prong grounding plug ready for connection to a 120V, 15 A, 60 Hz power supply.

O – 1" <sup>2</sup> minimum hole size for plug. Outlet to be installed in adjacent cabinetry

### Notes

Miele appliances can be installed flush or proud. Discuss your installation requirements with your architect, designer and installer.

All installations must be done in accordance with local codes.

Note: Drawing is not to scale Specification Sheets OJS 11142011




Product and Cut-out Dimensions

Warming Drawer

ESW 4716 Europa Design Clean Touch Steel with a DS 4043 Square

Series Handle

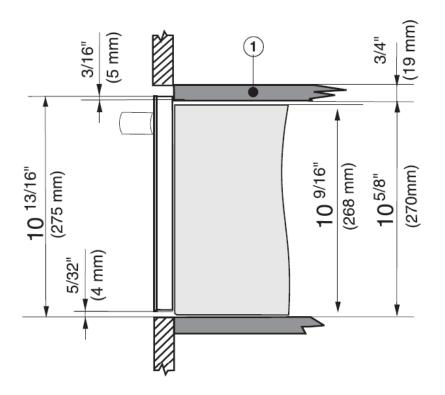

# Side view

A base is required for solo installations

### **Location Codes**

E – The drawer comes equipped with a 5 ft. (1.5 m) power cord with a three-prong grounding plug ready for connection to a 120V, 15 A, 60 Hz power supply.

O – 1" <sup>2</sup> minimum hole size for plug. Outlet to be installed in adjacent cabinetry

### Notes

Miele appliances can be installed flush or proud. Discuss your installation requirements with your architect, designer and installer.

All installations must be done in accordance with local codes.

Note: Drawing is not to scale Specification Sheets OJS 11142011