

Miele

42" Built-In Ventilation Hood

DA 2518

pancake

- 1 cup flour
- 1 egg
- 1 cup milk
- 1/2 cup sugar



42" Built-In Ventilation Hood

SPECIFICATIONS	
Overall Unit Dimensions	43 ³ / ₄ " (1102 mm) W x 12 ⁷ / ₈ " (326 mm) H x 15 ¹³ / ₁₆ " (402 mm) D
Built-In	
Minimum Opening Dimensions	42 ¹ / ₈ " (1070 mm) W x 14 ⁹ / ₁₆ " (370 mm) D
Minimum Opening Thickness	⁵ / ₈ " (16 mm)
Maximum Opening Thickness	1 ³ / ₈ " (35 mm)
Fan	
Fan Speeds	4
Maximum CFM	625 CFM, (Reducing Collar is available to reduce Air flow to less than 400 CFM)
Duct	
Recommended Duct Diameter	6" (150 mm)
Electrical	
Electrical Requirements	120V, 60Hz, 15A
Power Cord	Molded NEMA 5-15 plug, 2.5 ft (0.75 m)
Shipping	
Shipping Weight	40.4 lbs (18.3 kg)
Shipping Dimensions	46 ⁷ / ₁₆ " W x 21 ⁷ / ₈ " H x 18 ¹ / ₂ " D
Optional Accessories	
Recirculation Kit (Round)	DUU 150
Recirculation Kit (Rectangle)	DUU 151
OdorFree Charcoal Filter	DKF 15-900
CFM Reducing Collar	R2000
Support	
Call Miele	(800) 999-1360
Miele Website	www.mieleusa.com
20/20 Link	2020technologies.com




DA 2518
Item 28251855USA

42" Built-In Ventilation Hood


INSTALLATION SPECIFICATIONS

Product Dimensions

Front View

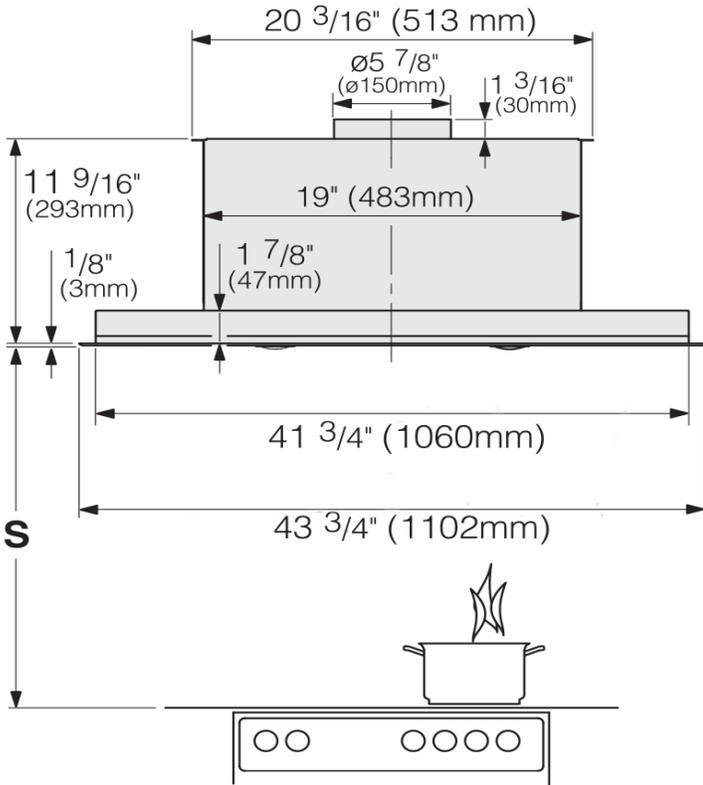


Side View

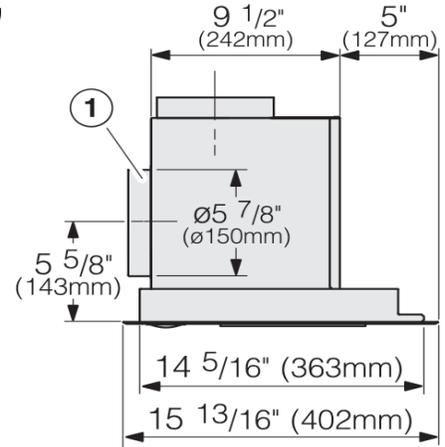


① The ducting can also be connected at the back.

Top View

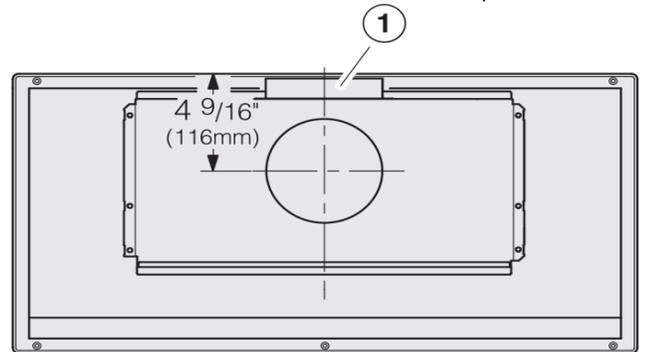

① The ducting can also be connected at the back.

Niche/Cutout Dimensions

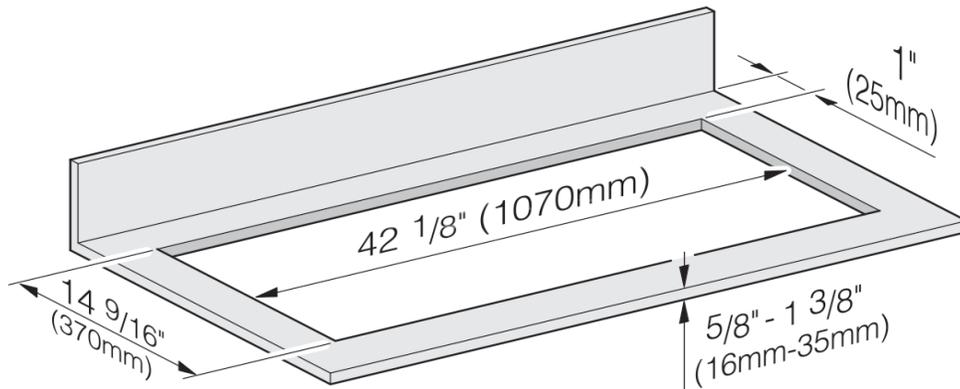

42" Built-In Ventilation Hood

INSTALLATION SPECIFICATIONS

Distance Between Cooktop and Ventilation Hood (S)

Provided a larger distance is not given by the manufacturer of the cooktop, follow the minimum safety distances between a cooktop and the bottom of the hood.

Please also observe the information contained in the "IMPORTANT SAFETY INSTRUCTIONS" section of the manual.

Cooking appliance	Minimum distance S	
	Miele products	Non-Miele products
Electric Cooktops	24" (610 mm)	
Electric Barbeques and Fryers	26" (660 mm)	
Multiburner Gas Cooktops ≤ 43,000 BTU/hr (12.6 W), no burner > 15,000 BTU/hr (4.5 kW).	26" (660 mm)	30" (760 mm)
Multiburner Gas Cooktops ≤ 73,800 BTU/hr (21.6 W), no burner > 16,500 BTU/hr (4.8 kW)	30" (760 mm)	
Multiburner Gas Cooktops > 73,800 BTU/hr (21.6 W), or one of the burners > 16,500 BTU/hr (4.8 kW)	Not possible	
Single Burner Gas Cooktops ≤ 20,500 BTU/hr (6 kW)	26" (660 mm)	30" (760 mm)
Single Burner Gas Cooktops > 20,500 BTU/hr (6 kW) ≤ 27,600 BTU/hr (8.1 kW)	30" (760 mm)	
Single Burner Gas Cooktops > 27,600 BTU/hr (8.1 kW)	Not possible	

If you are installing a front panel made of wood or plastic to the hood, observe the safety distances given by the cooktop manufacturer regarding the use of easily flammable materials.