

## 43" Ceiling Extractor

DA 2818



## 43" Ceiling Extractor

| SPECIFICATIONS                                       |                                                                                                                                                                                                                       |
|------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Overall Unit Dimensions                              | 43 <sup>5</sup> / <sub>16</sub> " (1100 mm) W x 12 <sup>1</sup> / <sub>8</sub> " (308 mm) H x 27 <sup>9</sup> / <sub>16</sub> " (700 mm) D                                                                            |
| <b>Built-In</b>                                      |                                                                                                                                                                                                                       |
| Opening Dimensions                                   | 38 <sup>9</sup> / <sub>16</sub> " (980 mm) W x <sup>5</sup> / <sub>8</sub> " - 1 <sup>3</sup> / <sub>8</sub> " (16 - 35 mm) H x 21 <sup>7</sup> / <sub>8</sub> " (556 mm) D                                           |
| Recommended Distance From Cooktop                    | 27 <sup>9</sup> / <sub>16</sub> " - 51 <sup>3</sup> / <sub>16</sub> " (700 - 1300 mm)<br>Please note that the greater the distance from the cooktop, the less effective the hood is at drawing in the cooking vapors. |
| <b>Fan</b>                                           |                                                                                                                                                                                                                       |
| Fan Speeds                                           | 4                                                                                                                                                                                                                     |
| Maximum CFM                                          | 625 CFM, (Reducing Collar is available to reduce air flow to less than 400 CFM)                                                                                                                                       |
| <b>Duct</b>                                          |                                                                                                                                                                                                                       |
| Recommended Duct Diameter                            | 6" (150 mm)                                                                                                                                                                                                           |
| <b>Electrical</b>                                    |                                                                                                                                                                                                                       |
| Electrical Requirements                              | 120V, 60Hz, 15A                                                                                                                                                                                                       |
| Power Cord                                           | Molded NEMA 5-15 plug, 2.5 ft (0.75 m)                                                                                                                                                                                |
| <b>Shipping</b>                                      |                                                                                                                                                                                                                       |
| Shipping Weight                                      | 71 lbs (32.2 kg)                                                                                                                                                                                                      |
| Shipping Dimensions                                  | 53 <sup>3</sup> / <sub>4</sub> " W x 21 <sup>5</sup> / <sub>8</sub> " H x 34 <sup>1</sup> / <sub>16</sub> " D                                                                                                         |
| <b>Optional Accessories</b>                          |                                                                                                                                                                                                                       |
| Recirculation Kit                                    | DUU 2900-900                                                                                                                                                                                                          |
| OdorFree Charcoal Filter<br>(Used with DUU 2900-900) | DKF 18-900 (x2)                                                                                                                                                                                                       |
| CFM Reducing Collar                                  | R2000                                                                                                                                                                                                                 |
| <b>Support</b>                                       |                                                                                                                                                                                                                       |
| Call Miele                                           | (800) 999-1360                                                                                                                                                                                                        |
| Miele Website                                        | <a href="http://www.mieleusa.com">www.mieleusa.com</a>                                                                                                                                                                |
| 20/20 Link                                           | <a href="http://2020technologies.com">2020technologies.com</a>                                                                                                                                                        |




DA 2818  
Item 28281855USA

## 43" Ceiling Extractor


### INSTALLATION SPECIFICATIONS

#### Product Details


#### Front View

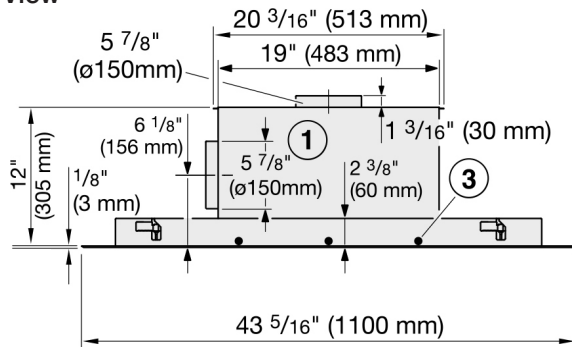

#### Side View

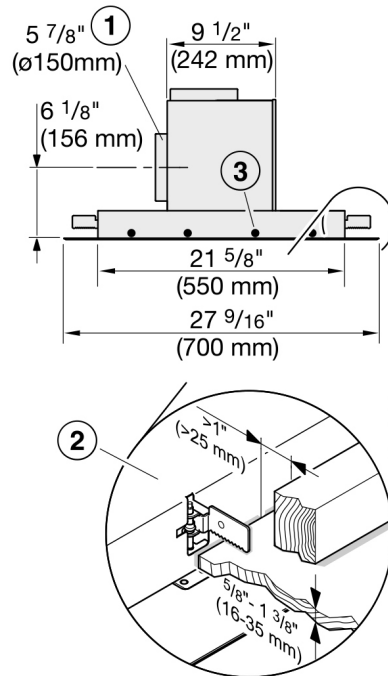


#### Top View

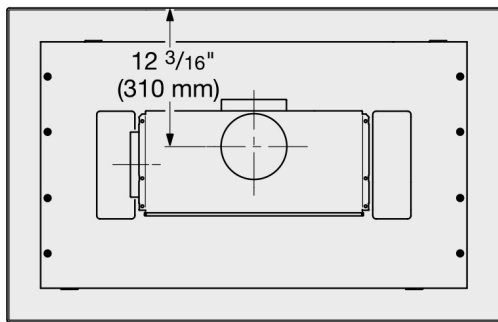


- ① Exhaust connection can be made on the top, left side and rear of the ventilation blower box.
- ② The ventilation hood is fastened in the cut-out using clamps. A solid installation surface, e.g., made of wood, is required. Make sure that the structure can support the load. Around the clamps, components such as supports and ducting must be at least 1" (25 mm) from the cut-out.
- ③ There are additional fixing points on the installation surface.

#### Niche/Cutout Details

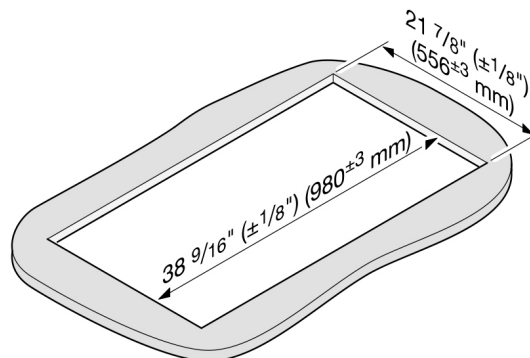

## 43" Ceiling Extractor

Recirculation Kit DUU 2900-900  
(Optional Accessory)

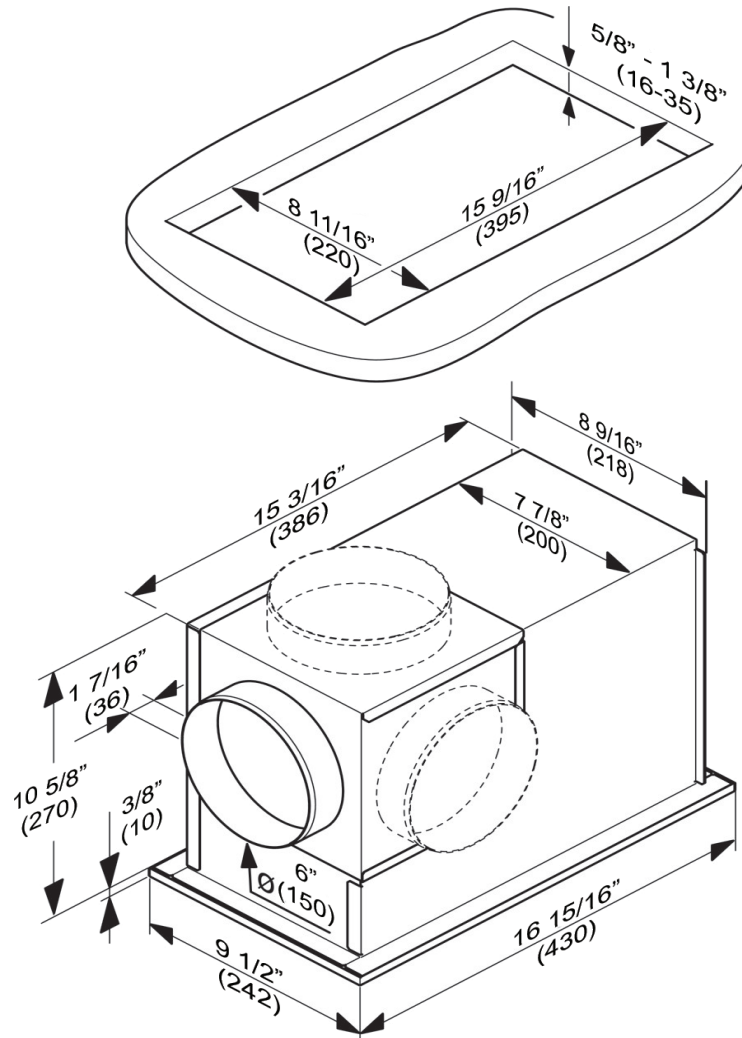

## 43" Ceiling Extractor

### Reducing Collar (Optional Accessory)



If you would like to reduce the environmental impact of your ventilation system by limiting the CFM output the Reducing Collar can be installed. It reduces the air flow to less than 400 CFM. Check local building codes for maximum CFM requirements.