

Built-Under  
Ventilation Hood

DA 1180



# Built-Under Ventilation Hood DA 1180



## FEATURES

- Designed for recirculated or vented use
- Installation: Under-cabinet, wall mounting
- Maximum 400 CFM
- Removable, dishwasher-safe stainless steel filters
- Sliding control panel for light and 4 fan speed
- Integrated halogen lighting
- Stainless steel finish
- RAL color option for orders over 10 units



## SPECIFICATIONS

**DA 1180** — Item 28118055USA

Vented or Recirculating	Maximum 400 CFM
Dimensions	29 <sup>15</sup> / <sub>16</sub> " (760 mm) W x 5" (125 mm) H x 19 <sup>1</sup> / <sub>16</sub> " (500 mm) D
Minimum distance above cooktop	Please refer to page 20 of the installation manual
Color	Available in brushed stainless steel or RAL colors (for orders over 10 units)
<b>Electrical</b>	
Electrical Requirements	120 V, 60 Hz, 15 Amps
Power Cord	Moled Plug 6.5 ft. (2m); NEMA 5-15
<b>Optional Accessories</b>	
OdorFree Charcoal Filter	DKF 18-1 OdorFree Charcoal Filter
Reducing Collar (air flow max. 400 CFM)	
<b>Shipping</b>	
Shipping Weight	28.4 lbs (12.9 kg)
<b>Support</b>	
Call	800.843.7231
20/20	☎2020technologies.com



For recirculating mode,  
Recirculating Kit included.


OdorFree Charcoal Filter needs to be  
purchased separately

# Built-Under Ventilation Hood DA 1180




## PRODUCT VIEWS

Front View

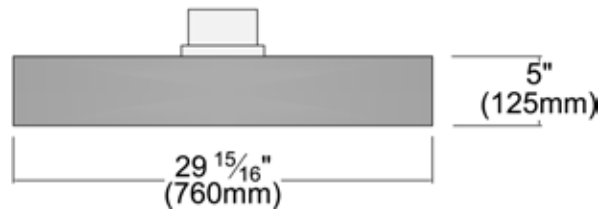

Top View

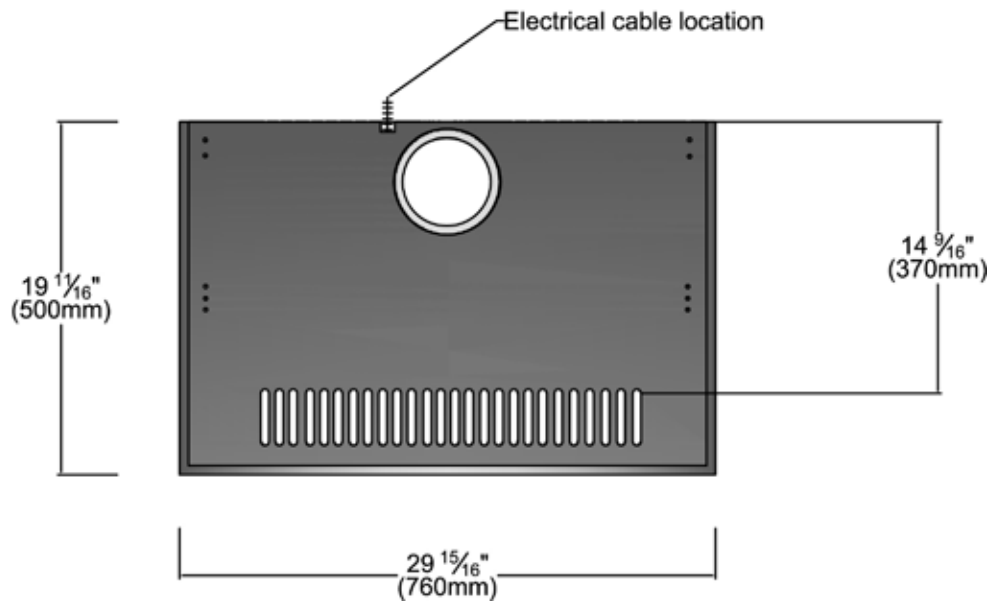


# Built-Under Ventilation Hood DA 1180



## PRODUCT VIEWS

Side View

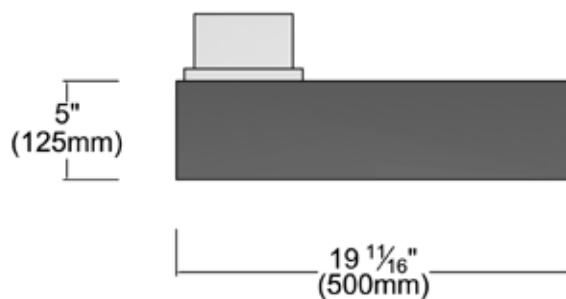

Rear View

