

36" Extra-Slim Insert Hood

DA 2390 Stainless Steel



36" Extra-Slim Insert Hood DA 2390 Stainless Steel



DA 2390 Features:

- Extra-slim insert fits in less than 12" upper cabinetry
- Integrated LED ClearView lighting
- Straight stainless steel canopy
- Front-mounted backlit controls
- Designed for vented or recirculated use
- For wall cabinet installation
- Removable, dishwasher-safe stainless steel filters
- Front mounted controls for lights and 4 fan speeds including intensive
- Automatic shut-off of intensive level, programmable for 10 minutes

SPECIFICATIONS

DA 2390 — Item 28239055USA

Overall Unit Width 34¹¹/₁₆" (884 mm)

Overall Unit Height 13⁵/₁₆" (338 mm)

Overall Unit Depth 11¹¹/₁₆" (297 mm)

Built-In

Minimum Opening Width 34¹/₁₆" (865 mm)

Minimum Opening Depth 10⁷/₈" (276 mm)

Minimum Opening Height 12⁵/₈" (320 mm)

Fan

Fan Speeds 4

Maximum CFM 625 CFM, (Reducing Collar is available to reduce Air flow to less than 400 CFM, more information on page 7)

Duct

Duct Diameter 6" (150 mm)

Electrical

Electrical Requirements 120V, 60Hz, 15A

Power Cord Molded NEMA 5-15 plug, 2.5 ft (0.75 m)

Shipping

Shipping Weight 24 lbs (11 lbs)

Shipping Dimensions 26³/₄" W x 16¹⁵/₁₆" H x 16¹⁵/₁₆" D

Support

Call Miele (800) 999-1360

Miele Website www.mieleusa.com

20/20 Link 2020technologies.com

Installation Accessories:



DUU 150

Recirculation kit



DUU 151

Recirculation kit



DKF19-1

OdorFree Charcoal filter
required accessory for
recirculation mode



Reducing collar

Reducing collar limits air
flow to less than 400 CFM



DAA6


6" Trim Kit

36" Extra-Slim Insert Hood DA 2390 Stainless Steel




INSTALLATION SPECIFICATIONS


Product Details

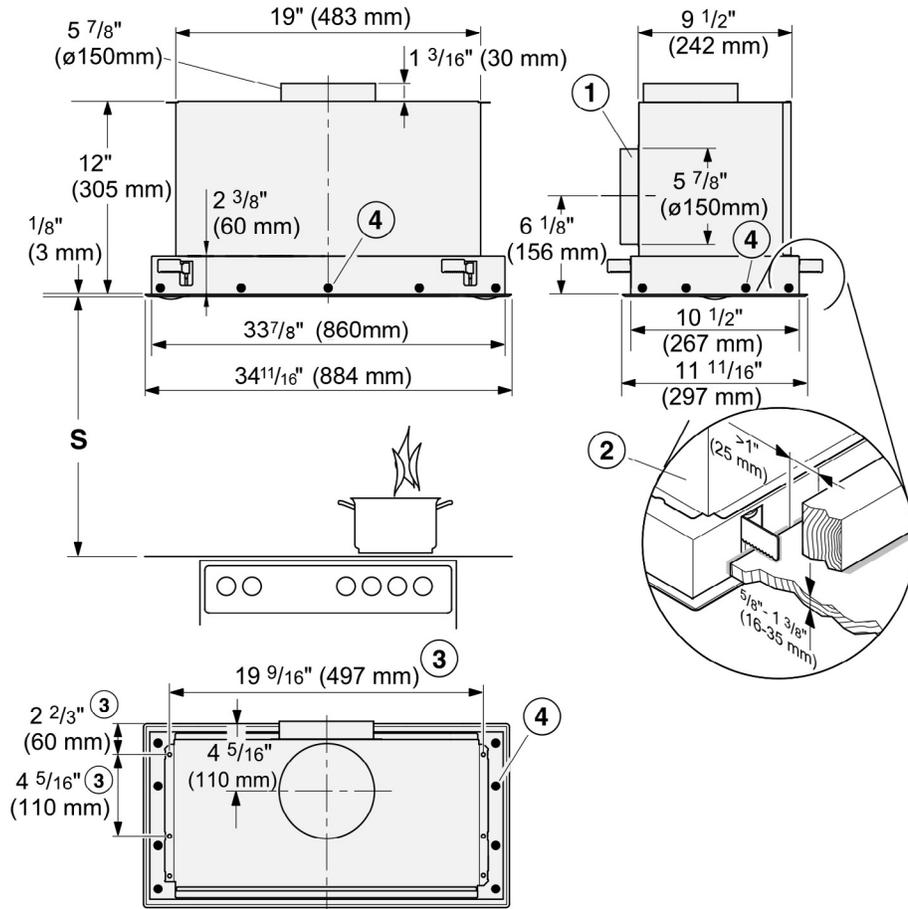

Cut-Out Details

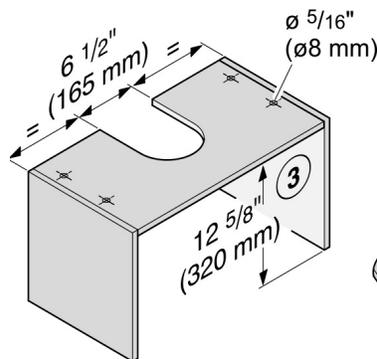

A	B
10 7/8" (±1/8") 276±3 mm	34 1/16" (±1/8") 865±3 mm

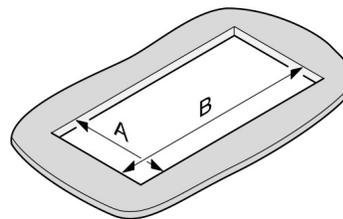

- ① The ducting can also be connected at the back.
- ② The ventilation system is fastened in the cut-out using clamps. A solid installation surface, e.g., made of wood, is required. Make sure that the structure can support the load. Around the clamps, components such as supports and ducting must be at least 1" (25 mm) from the cut-out.
- ③ Alternatively, the ventilation system can be secured to four fixing points on an interim shelf.
- ④ There are additional fixing points on the installation surface.

36" Extra-Slim Insert Hood

DA 2390 Stainless Steel



INSTALLATION SPECIFICATIONS

Distance Between Cooktop and Ventilation Hood (S)

Provided a larger distance is not given by the manufacturer of the cooktop, follow the minimum safety distances between a cooktop and the bottom of the hood.


Please also observe the information contained in the "IMPORTANT SAFETY INSTRUCTIONS" section.

Cooking appliance	Minimum distance S	
	Miele appliance	Non-Miele appliance
Electric Cooktops	24" (610 mm)	
Electric Barbeques and Fryers	26" (660 mm)	
Multiburner Gas Cooktops ≤ 43,000 BTU/hr (12.6 kW), no burner > 15,000 BTU/hr (4.5 kW).	26" (660 mm)	30" (760 mm)
Multiburner Gas Cooktops ≤ 73,800 BTU/hr (21.6 kW), no burner > 16,500 BTU/hr (4.8 kW)	30" (760 mm)	
Multiburner Gas Cooktops > 73,800 BTU/hr (21.6 kW), or one of the burners > 16,500 BTU/hr (4.8 kW)	Not possible	
Single Burner Gas Cooktops ≤ 20,500 BTU/hr (6 kW)	26" (660 mm)	30" (760 mm)
Single Burner Gas Cooktops > 20,500 BTU/hr (6 kW) ≤ 27,600 BTU/hr (8.1 kW)	30" (760 mm)	
Single Burner Gas Cooktops > 27,600 BTU/hr (8.1 kW)	Not possible	


36" Extra-Slim Insert Hood DA 2390 Stainless Steel



6" Trim Kit DAA6
(Optional Accessory)
Product with DAA6 Details

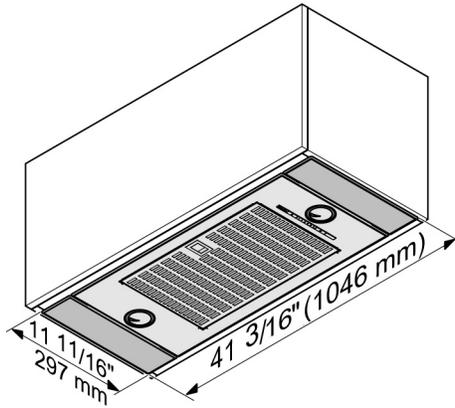


Cut-Out Details

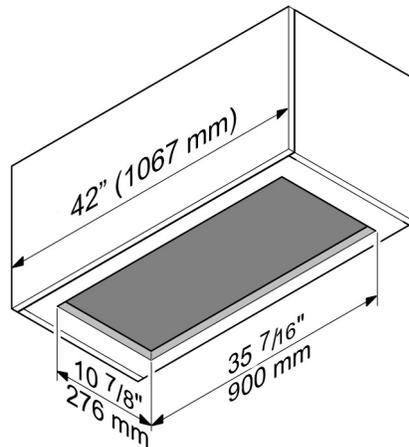

36" Extra-Slim Insert Hood DA 2390 Stainless Steel




Recirculation Kit DUU 150 (Optional Accessory)

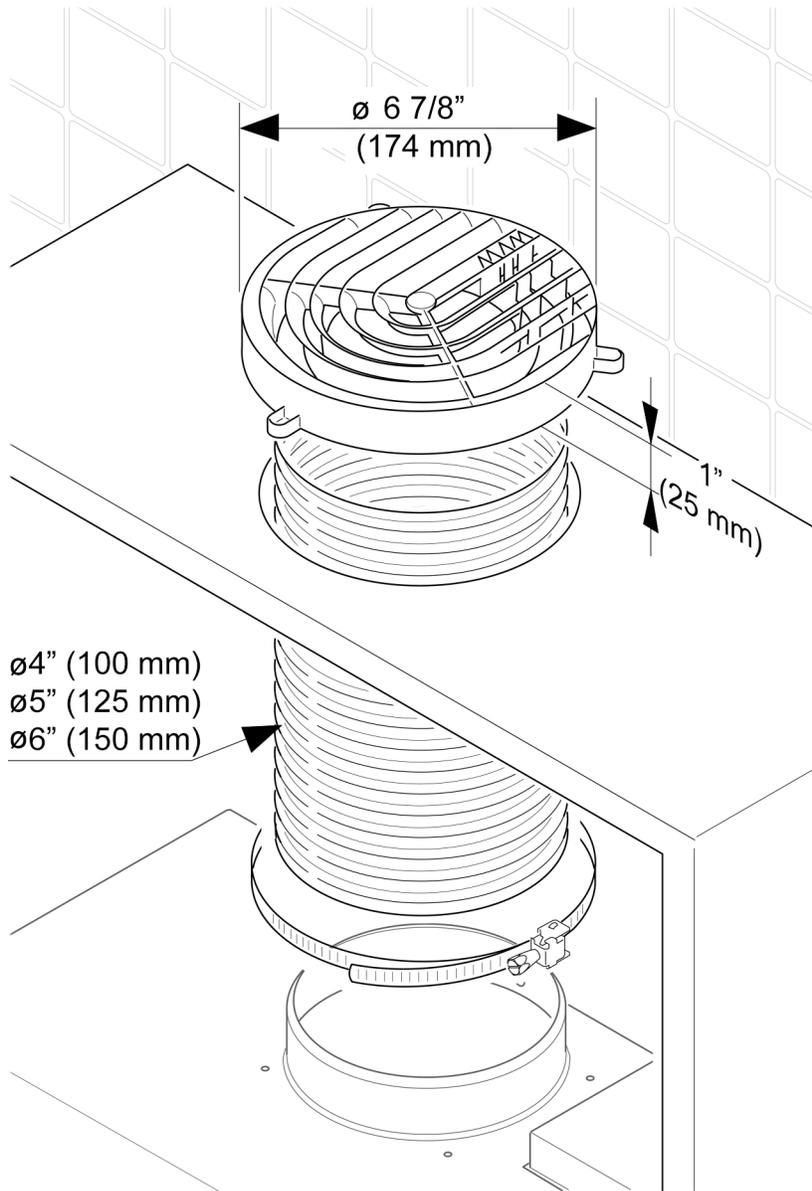

36" Extra-Slim Insert Hood DA 2390 Stainless Steel




Recirculation Kit DUU 151 (Optional Accessory)

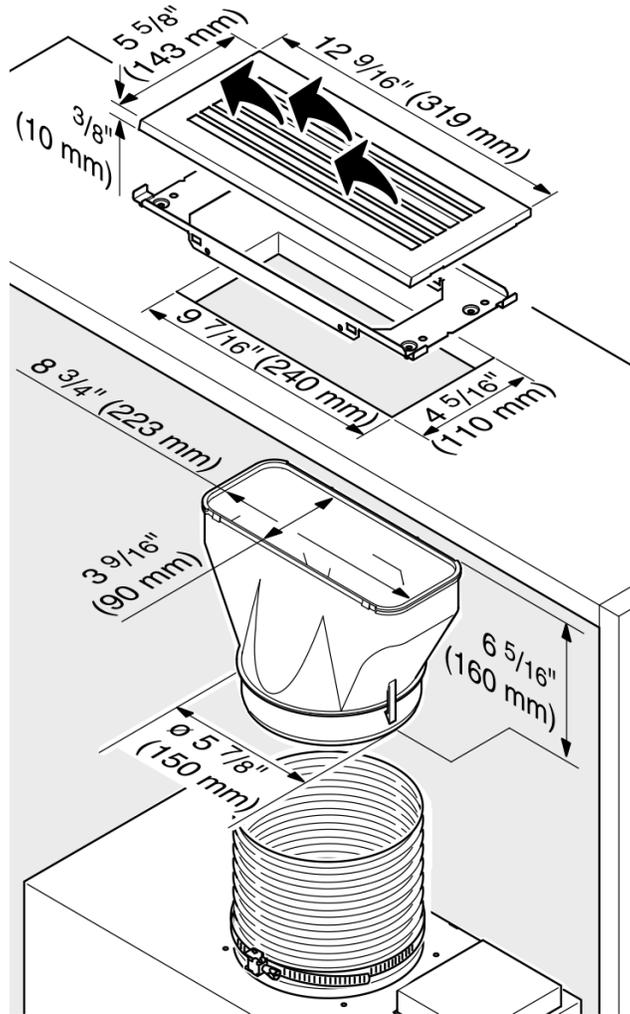

36" Extra-Slim Insert Hood DA 2390 Stainless Steel



R2000
(optional accessory)

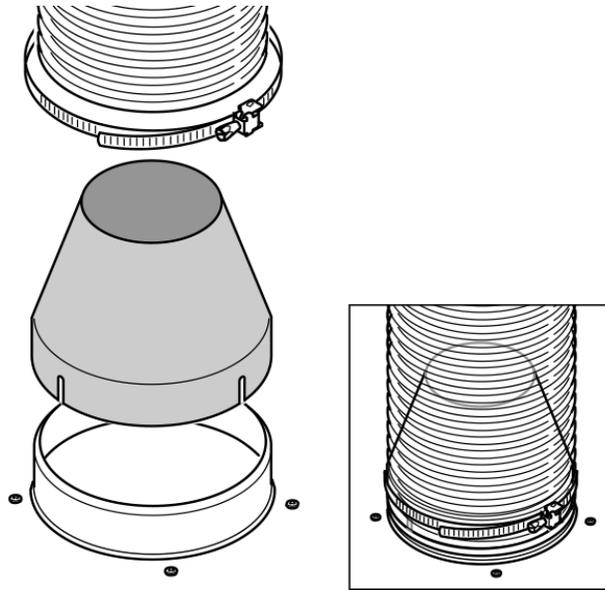

If you would like to reduce the environmental impact of your ventilation system by limiting the CFM output the Reducing Collar can be installed. It reduces the air flow to less than 400 CFM. Check local building codes for maximum CFM requirements.