

Puristic Island Ventilation Hood DA 6690 D BRWS






DA 6690 D BRWS Features:

- LED ClearView lighting
- Con@ctivity communication between hood and cooktop
- Touch on Glass controls
- Four fan speeds (incl. intensive)
- Removable dishwasher-safe stainless steel grease filter
- Filter saturation indicator (grease and charcoal filters)
- Delayed shutdown for 5 or 15 minutes
- Automatic shutdown of intensive level, programmable for 10 minutes

SPECIFICATIONS	
DA 6690 D BRWS - Item 28669035USA	
Max CFM	625 CFM
Canopy Dimensions	35³/₅" (898mm) W x 3³/₅" (85mm) H x 23³/₁₅" (598mm) D
Vented Height	27 ³ / ₄ " (705mm) - 39 ⁹ / ₁₆ (1005mm)
Recirculation Height	30¹/8" (765mm) - 43⁵/16" (1075mm)
Chimney Dimensions	12" (305mm) W x 11 ⁵ / ₈ " (295mm) D
Electrical	
Electrical Requirements	120 V, 60 Hz, 15 Amps
Power Cord Requirements	The hood must be hard wired. A power cord with a minimum length of 279/16" (700mm) is required between the ceiling and the hood connectors. Power cord is not Included.
Exhaust Duct	
Recommened Duct Diameter	6" (150mm)
Shipping	
Shipping Weight	77 lbs (35kg)
Support	
Call Miele	800.843.7231
Miele Website	⁴www.mieleusa.com
20/20 Link	⁴2020technologies.com



PRODUCT VIEW

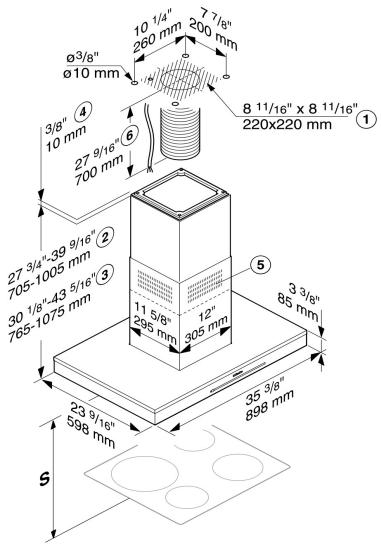

- 1 Mounting area for the exhaust ducting and power cable. In recirculation mode, only the power cord is required.
- 2 Possible height range for appliance in vented mode
- 3 Possible height range for appliance in recirculation mode
- 4 Alternative installation with spacer frame
- 5 Air vent positioned at the top for recirculation
- ⑥ A power cord is required to connect the hood to the power supply (Power cord is not supplied). With extraction mode flexible ductin is also required.

Exhaust connection Ø 6" (150 mm)

S - Distance between cooktop and ventilation hood. Please see manual for further detail.