

Puristic Wall Ventilation Hood

DA 6690 W BRWS



Puristic Wall Ventilation Hood DA 6690 W BRWS



DA 6690 W BRWS

Features:

- LED ClearView lighting
- Con@ctivity - communication between hood and cooktop
- Touch on Glass controls
- Four fan speeds (incl. intensive)
- Removable dishwasher-safe stainless steel grease filter
- Filter saturation indicator (grease and charcoal filters)
- Delayed shutdown for 5 or 15 minutes
- Automatic shutdown of intensive level, programmable for 10 minutes

SPECIFICATIONS


DA 6690 W BRWS — Item 28669030USA

Max CFM	625 CFM
Canopy Dimensions	35 ³ / ₈ " (898mm) W x 3 ³ / ₈ " (85mm) H x 19 ¹ / ₁₆ " (500mm) D
Vented Height	28" (710mm) - 40 ⁹ / ₁₆ " (1030mm)
Recirculation Height	33 ¹ / ₁₆ " (840mm) - 45 ¹¹ / ₁₆ " (1160mm)
Chimney Dimensions	11 ³ / ₈ " (290mm) W x 10 ⁵ / ₈ " (270mm) D
Electrical	
Electrical Requirements	120 V, 60 Hz, 15 Amps
Power Cord	NEMA 5-15 molded plug, Length 2.5 ft (0.75m)
Exhaust Duct	
Recommended Duct Diameter	6" (150mm)
Shipping	
Shipping Weight	57.2 lbs (26kg)
Support	
Call Miele	800.843.7231
Miele Website	www.mieleusa.com
20/20 Link	2020technologies.com

Puristic Wal Ventilation Hood DA 6690 W BRWS



PRODUCT VIEW

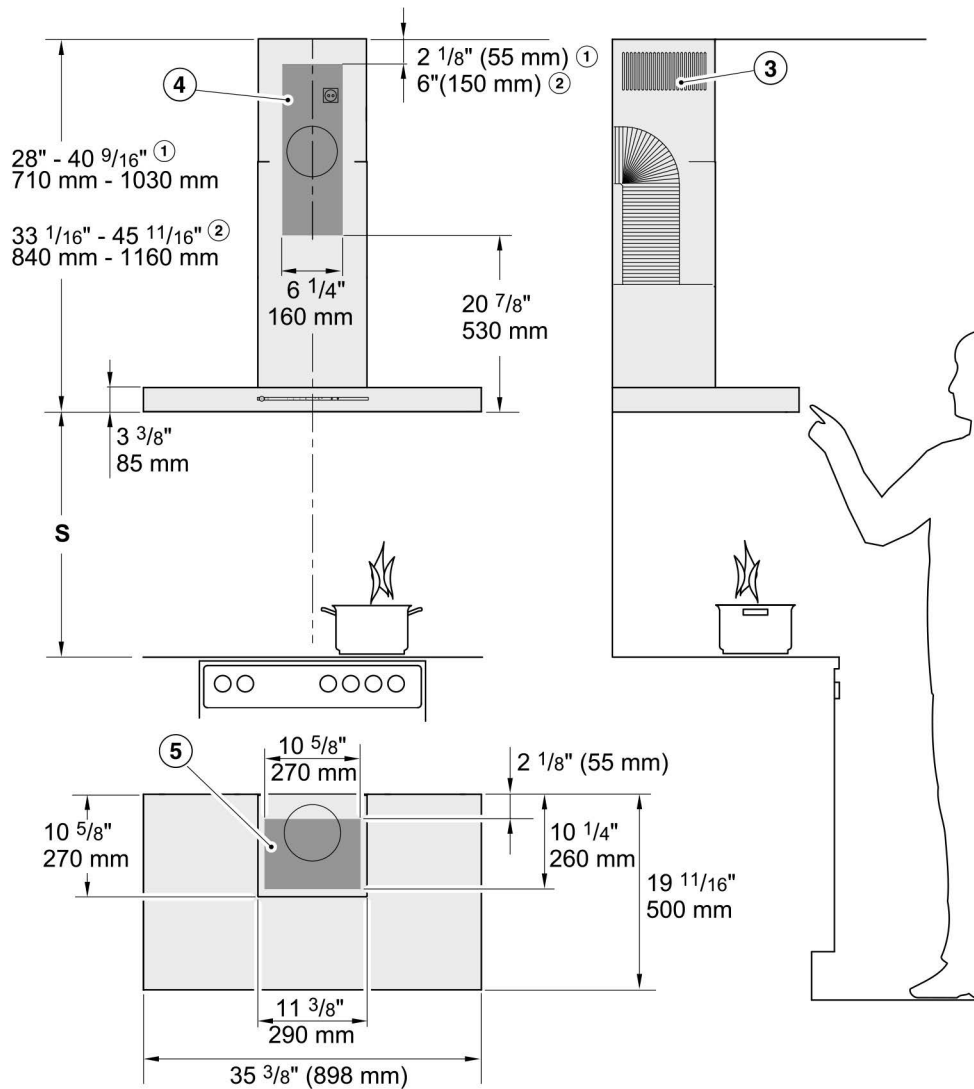

The drawing is not to scale.

- ① Extraction
- ② Recirculation
- ③ Air vent positioned at top for recirculation
- ④⑤ Mounting area (only ④ is required for recirculation hoods). Wall and ceiling area for exhaust duct opening and for wall receptacle installation. Placement of receptacle on wall is required for recirculating hoods.

Vent collar \varnothing 6" (150 mm), with adapter \varnothing 5" (125 mm).

S - Distance between cooktop and ventilation hood. Please see manual for further detail.