

# Puristic Wall Ventilation Hood

DA 6690 W HVBR



# Puristic Wall Ventilation Hood DA 6690 W HVBR



## DA 6690 W HVBR

### Features:

- LED ClearView lighting
- Con@ctivity - communication between hood and cooktop
- Touch on Glass controls
- Four fan speeds (incl. intensive)
- Removable dishwasher-safe stainless steel grease filter
- Filter saturation indicator (grease and charcoal filters)
- Delayed shutdown for 5 or 15 minutes
- Automatic shutdown of intensive level, programmable for 10 minutes


### SPECIFICATIONS

DA 6690 W HVBR – Item 28669000USA

Max CFM	625 CFM
Canopy Dimensions	35 <sup>3</sup> / <sub>8</sub> " (898mm) W x 3 <sup>3</sup> / <sub>8</sub> " (85mm) H x 19 <sup>1</sup> / <sub>16</sub> " (500mm) D
Vented Height	28" (710mm) - 40 <sup>9</sup> / <sub>16</sub> " (1030mm)
Recirculation Height	33 <sup>1</sup> / <sub>16</sub> " (840mm) - 45 <sup>11</sup> / <sub>16</sub> " (1160mm)
Chimney Dimensions	11 <sup>3</sup> / <sub>8</sub> " (290mm) W x 10 <sup>5</sup> / <sub>8</sub> " (270mm) D
<b>Electrical</b>	
Electrical Requirements	120 V, 60 Hz, 15 Amps
Power Cord	NEMA 5-15 molded plug, length 2.5 ft (0.75m)
<b>Exhaust Duct</b>	
Recommended Duct Diameter	6" (150mm)
<b>Shipping</b>	
Shipping Weight	57.2 lbs (26kg)
<b>Support</b>	
Call Miele	800.843.7231
Miele Website	<a href="http://www.mieleusa.com">www.mieleusa.com</a>
20/20 Link	<a href="http://2020technologies.com">2020technologies.com</a>

# Puristic Wall Ventilation Hood DA 6690 W HVBR

## PRODUCT VIEW

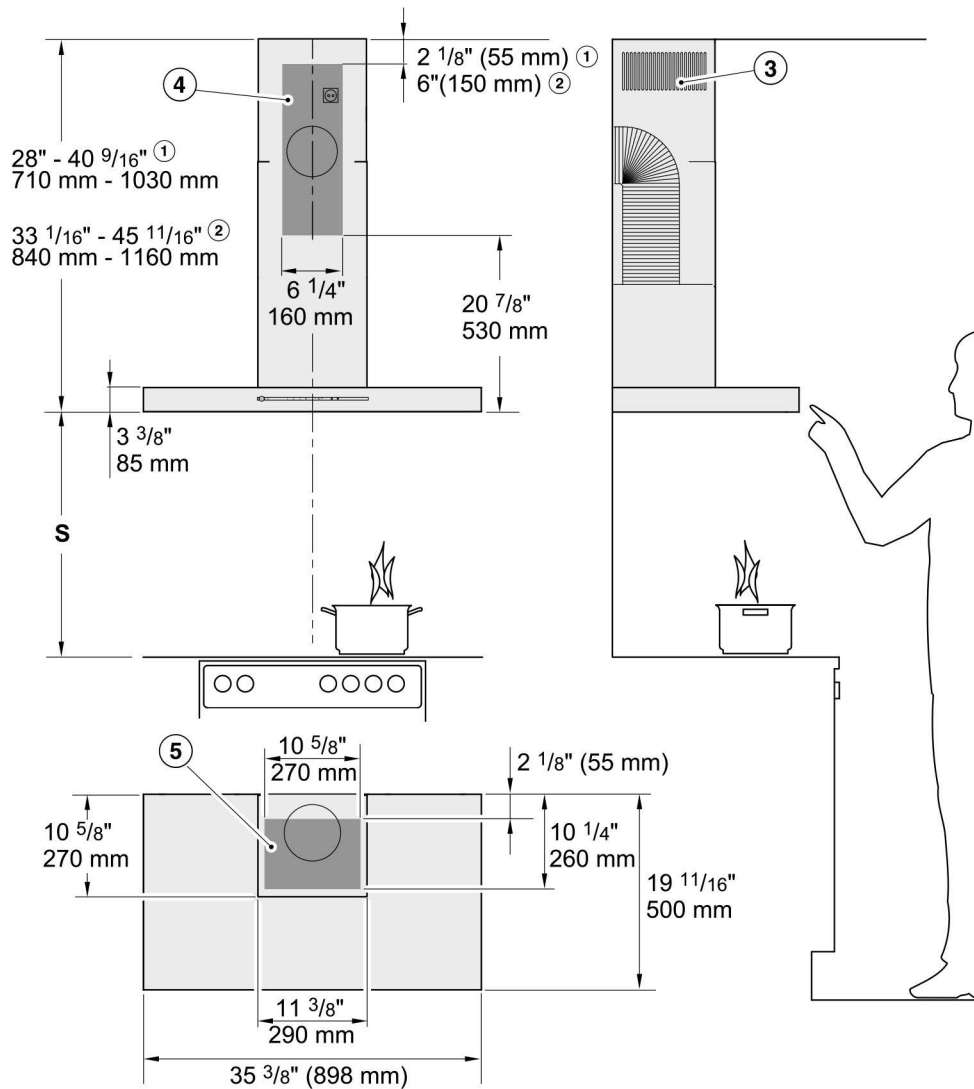

The drawing is not to scale.

- ① Extraction
- ② Recirculation
- ③ Air vent positioned at top for recirculation
- ④⑤ Mounting area (only ④ is required for recirculation hoods). Wall and ceiling area for exhaust duct opening and for wall receptacle installation. Placement of receptacle on wall is required for recirculating hoods.

Vent collar  $\varnothing$  6" (150 mm), with adapter  $\varnothing$  5" (125 mm).

S - Distance between cooktop and ventilation hood. Please see manual for further detail.