

Miele

30" Wall Ventilation Hood

PUR 88 W



30" Wall Ventilation Hood


SPECIFICATIONS	
Overall Unit Width	29 ⁷ / ₁₆ " (748 mm)
Overall Unit Height - Vented	26 ¹⁵ / ₁₆ " (685 mm) - 39 ⁹ / ₁₆ " (1005 mm)
Overall Unit Height - Recirculated	32 ¹ / ₁₆ " (815 mm) - 44 ¹¹ / ₁₆ " (1135 mm)
Overall Unit Depth	19 ¹¹ / ₁₆ " (500 mm)
Fan	
Fan Speeds	4, Including Intensive setting
Maximum CFM	625 CFM, (Reducing Collar is available to reduce air flow to less than 400 CFM)
Duct	
Recommended Duct Diameter	6" (150 mm)
Electrical	
Electrical Requirements	120V, 60Hz, 15A
Power Cord	Molded NEMA 5-15 plug, 2.5 ft (0.75 m)
Electrical Rating	359 W (Blower: 350 W; Lighting: 3x3 W)
Optional Accessories	
Recirculation Kit	DUW 20
OdorFree Charcoal Filter	DKF12-900
CFM Reducing Collar	R2000
Shipping	
Shipping Weight	62 lbs (28 kg)
Shipping Dimensions	40 ¹ / ₈ " (1020 mm) W x 26 ³ / ₁₆ " (665 mm) H x 25 ⁹ / ₁₆ " (650 mm) D
Support	
Call Miele	(800) 999-1360
Miele Website	www.mieleusa.com
20/20 Link	2020technologies.com



PUR 88 W
Item 28428654USA

30" Wall Ventilation Hood

INSTALLATION SPECIFICATIONS

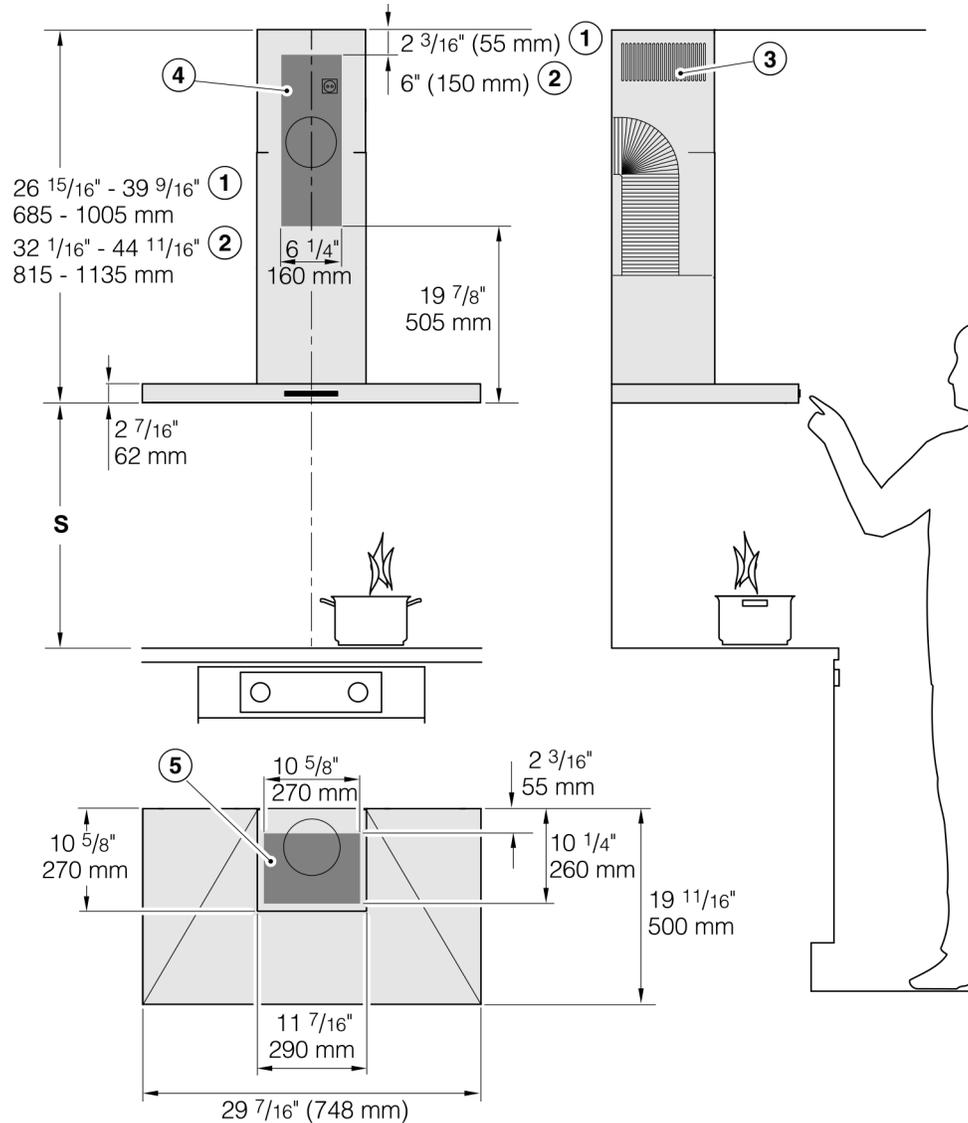


- ① Extraction
- ② Recirculation
- ③ Air vent positioned at top for recirculation
- ④⑤ Mounting area (only ④ is required for recirculation hoods). Wall and ceiling area for exhaust duct opening and for wall socket installation. Only the wall socket installation is required for recirculation hoods.

Vent collar \varnothing 6" (150 mm), with adapter \varnothing 5" (125 mm).

30" Wall Ventilation Hood

INSTALLATION SPECIFICATIONS

Mounting Details

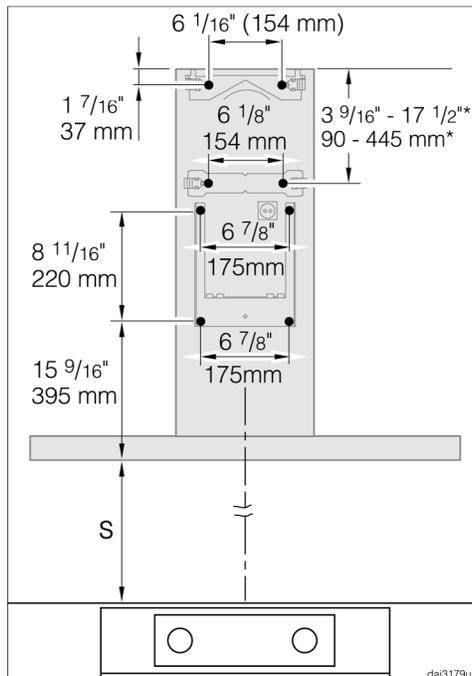

- Center unit over cooking surface
- Distances "S" is determined by the cooking surface. See "Distance between cooktop and hood (S)" dimensions.
- If studs are not available in the required locations, a plywood backing (min. $\frac{1}{2}''$ (13 mm)) **MUST** be used to reinforce support. Reinforcing material should be affixed to structural wall members. Failure to adequately support the weight as stated may result in the ventilation system falling off the wall, causing personal injury and property damage.

30" Wall Ventilation Hood

INSTALLATION SPECIFICATIONS

Distance Between Cooktop and Ventilation Hood (S)

Provided a larger distance is not given by the manufacturer of the cooktop, follow the minimum safety distances between a cooktop and the bottom of the hood. Please also observe the information contained in the "IMPORTANT SAFETY INSTRUCTIONS" section.

Cooking appliance	Minimum distance S	
	Miele appliance	Non-Miele appliance
Electric Cooktops	24" (610 mm)	
Electric Barbeques and Fryers	26" (660 mm)	
Multiburner Gas Cooktops ≤ 43,000 BTU/hr (12.6 kW), no burner > 15,000 BTU/hr (4.5 kW).	26" (660 mm)	30" (760 mm)
Multiburner Gas Cooktops ≤ 73,800 BTU/hr (21.6 kW), no burner > 16,500 BTU/hr (4.8 kW)	30" (760 mm)	
Multiburner Gas Cooktops > 73,800 BTU/hr (21.6 kW), or one of the burners > 16,500 BTU/hr (4.8 kW)	Not possible	
Single Burner Gas Cooktops ≤ 20,500 BTU/hr (6 kW)	26" (660 mm)	30" (760 mm)
Single Burner Gas Cooktops > 20,500 BTU/hr (6 kW) ≤ 27,600 BTU/hr (8.1 kW)	30" (760 mm)	
Single Burner Gas Cooktops > 27,600 BTU/hr (8.1 kW)	Not possible	