

ContourLine 30" Double Convection Oven

H 6780 BP2



Miel







H 6780 BP2 Features:


- M Touch controls are both easy-tooperate and navigate. An intuitive swipe of the screen will quickly lead you to your desired selection
- · Self Clean Oven
- 19 Operating Modes including Moisture Plus (plumbed only) through increasing the humidity in the oven you can perfect your results e.g. crusty, glossy breads, juicy meats
- MasterChef Plus fully functional automatic programs to create 15 different types of bread at home
- MasterChef menu offers over 100 food types to cook to perfection
- Wireless Roast Probe for safe, easy handling and perfect roasting results
- Favorites up to 20 recipes
- · Sabbath Program
- CleanGlass Door for easier cleaning and superior design
- TwinPower Fans provide optimum and even distribution of hot air
- Soft Open and Soft Close for an easier handling
- ComfortSwivel Handle moves with the motion of your wrist, creating a more ergonomic feel when opening and closing the oven door

SPECIFICATIONS	
H 6780 BP2 — Item 22678055USA	
Overall Unit Width - Excluding Fascia Dimension	28 ⁷ / ₁₆ " (722 mm)
Overall Height - Excluding Fascia Dimension	49 ⁵ / ₁₆ " (1252 mm)
Overall Unit Depth - Excluding Fascia Dimension	23 ³ / ₄ " (603 mm)
Oven Door Clearance	22" (558 mm)
Overall Fascia Dimensions	$29^{13}/_{16}$ " (757 mm) W x $51^{9}/_{16}$ " (1308 mm) H x $^{7}/_{8}$ " (23 mm) D
Built-In	
Minimum Cabinet Width	28 ¹ / ₂ " (724mm)
Minimum Cabinet Depth	24" (610mm)
Minimum Cabinet Opening Height	51 ¹ / ₈ " (1298mm)
Minimum Base Support	410 lbs
Additional Cut-Outs Required	Cut-out 4" x 28" (100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation
Plumbing	
Plumbing Requirements	An Inline water filter, like activated carbon, is required to reduce mineral deposits. Do not connect to a Reverse Osmosis (RO) water system. Connect to a cold water supply only. Must be connected to a shut-off valve. The water shut-off valve must be accessible after installation. The water pressure must be between 14.5 and 145 psi (1 and 10 bars). If the pressure is higher, install a pressure-reducing valve. The supplied hose has a length of 4' 11" (1.5 m). The hose must not be shortened. The entire hose length must not exceed 24'7" (7.5 m).
Plumbed Hose Connection	Supplied hose: flexible braided 4'11" (1.5 m) with 3/8" compression fitting for connection to a shut off valve.
Electrical	
Electrical Requirements	120/240V 50A 60 Hz circuit 120/208V 50A 60 Hz circuit
Power Cord	NEMA 14-50 plug 5' 6" (1.7 m)
Shipping	
Shipping Weight	380 lbs
Shipping Dimensions	$32^{7/8}$ " W x $57^{11/16}$ " H x $30^{1/2}$ " L
Support	
Call Miele	800.999.1360
Miele Website	⁴www.mieleusa.com
20/20 Link	⁴2020technologies.com




PRODUCT VIEWS

Isometric

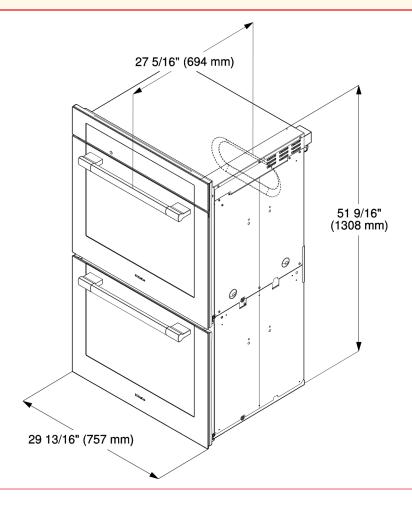


Front View

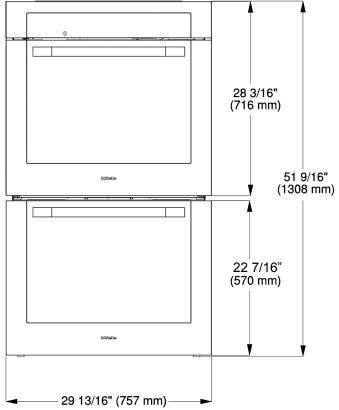




PRODUCT VIEWS

Top View

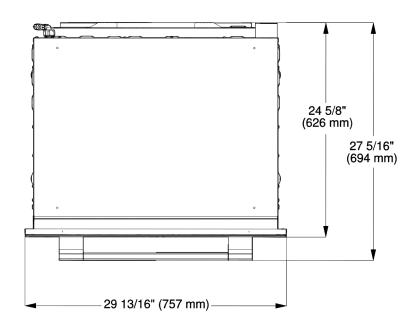


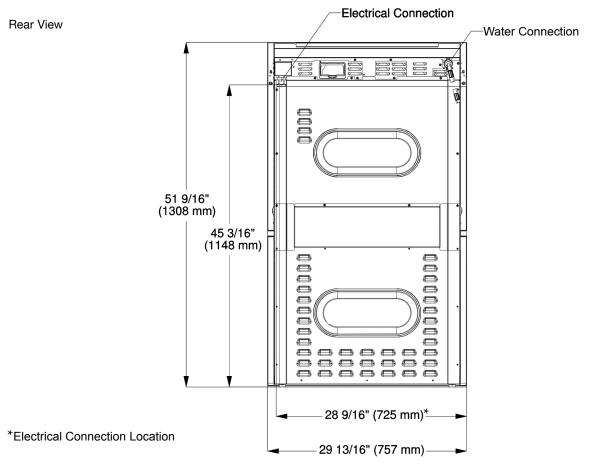




PRODUCT VIEWS

Side View

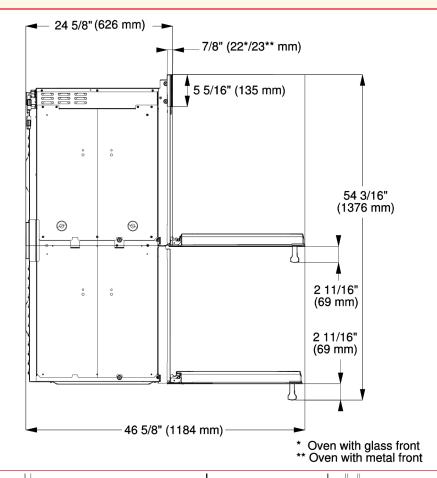

Door Swing Detail

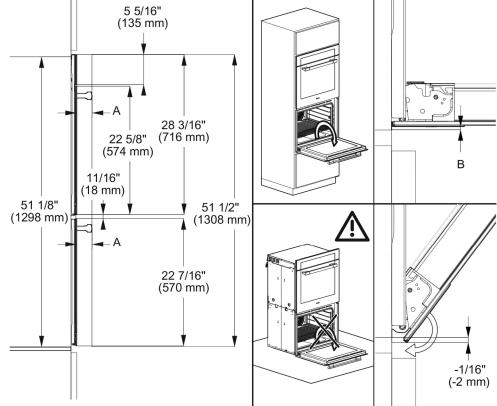

A H6780BP2: 2 3/4" (69 mm)


B Oven with glass front: 1/16" (2.2 mm)

Oven with metal front: 1/16" (1.2 mm)



INSTALLATION SPECIFICATIONS

Installation Niche

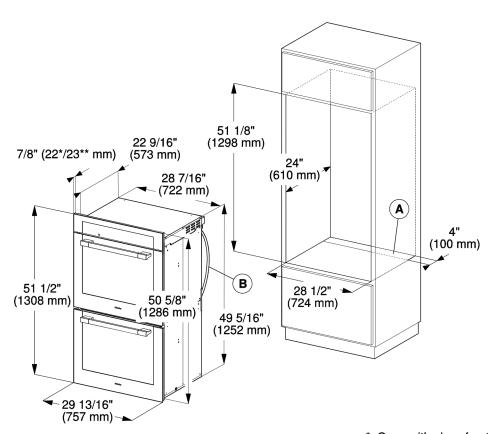


- * Oven with glass front** Oven with metal front

Cutout (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation




HANDLE DETAILS

All Miele Signature And PureLine Handle Dimensions



Please note hinges may require adjusting or replacing when changing from a ContourLine Handle to a PureLine or Miele Signature Handle.

All ContourLine Handle Dimensions



Please note hinges may require adjusting or replacing when changing from a PureLine or Miele Signature Handle to a ContourLine Handle.